


### EF - 0.55NA Glass Fibers, Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

Model	Part #	A	B	C	D	E	F	G	H	I	J	L
EF612	002122211012											12" (304.80 mm)
EF624	002122211024											24" (609.60 mm)
EF636	002122211036	.044	.154	.020	.500	.190	.750	.207	.750	.190	7.00	36" (914.40 mm)
EF655	002122211055	(1.12 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.84 mm)	(19.05 mm)	(6.35 mm)	(19.05 mm)	(5.84 mm)	(177.8 mm)	55" (1397.0 mm)
EF660	002122211060											60" (1524.0 mm)
EF665	002122211065											65" (1651.0 mm)
EF672	002122211072											72" (1828.8 mm)
EF824	002122308024											24" (609.60 mm)
EF836	002122308036	.088	.382	.032	.750	.220	1.00	.250	.750	.220	7.00	36" (914.40 mm)
EF848	002122308048	(2.24 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(5.59 mm)	(25.4 mm)	(6.35 mm)	(19.05 mm)	(5.59 mm)	(177.8 mm)	48" (1219.2 mm)
EF860	002122308060											60" (1524.0 mm)
EF872	002122308072											72" (1828.8 mm)
EF924	SK95540024	.138	1.50	.010	1.00	.300	1.50		2.00	.300	7.00	24" (609.60 mm)
EF936	SK95540036	(3.51 mm)	(38.10 mm)	(.254 mm)	(25.4 mm)	(7.62 mm)	(38.10 mm)		(50.8 mm)	(7.62 mm)	(177.8 mm)	36" (914.40 mm)

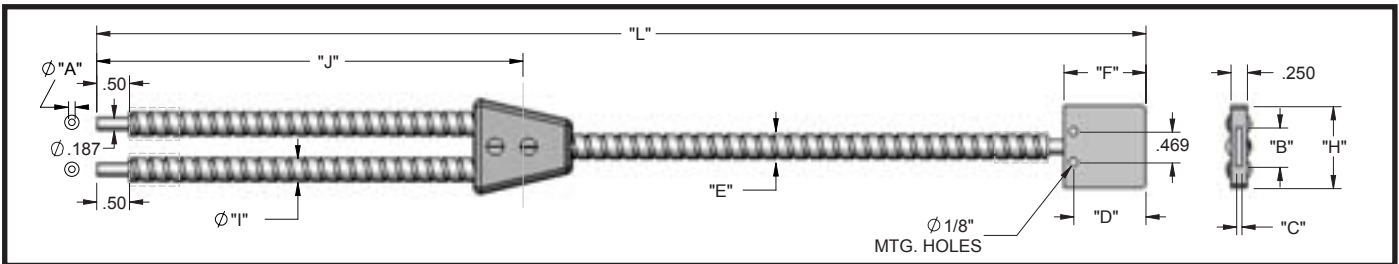

### EFX & EEFX - 0.55NA Glass Fibers, Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

Model	Part #	A	B	C	D	E	F	H	I	J	L
EFX612	002124306012										12" (304.80 mm)
EFX624	002124306024										24" (609.60 mm)
EFX636	002124306036	.044	.154	.020	.500	.203	.750	.750	.203	7.00	36" (914.40 mm)
EFX648	002124306048	(1.12 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.16 mm)	(19.05 mm)	(19.05 mm)	(5.16 mm)	(177.8 mm)	48" (1219.2 mm)
EFX672	002124306072										72" (1828.8 mm)
EFX824	002124308024										24" (609.60 mm)
EFX836	002124308036	.088	.382	.032	.750	.244	1.00	.750	.244	7.00	36" (914.40 mm)
EFX848	002124308048	(2.24 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(6.20 mm)	(25.4 mm)	(19.05 mm)	(6.20 mm)	(177.8 mm)	48" (1219.2 mm)
EFX860	002124308060										60" (1524.0 mm)
EFX872	002124308072										72" (1828.8 mm)
EFX896	002124308096										96" (2438.4 mm)
EEFX918	700002060018									11"	18" (457.20 mm)
EEFX924	700002060024	.138	1.50	.010	1.00	.300	1.50	2.00	.300	17"	24" (609.60 mm)
EEFX936	700002060036	(3.51 mm)	(38.10 mm)	(.254 mm)	(25.4 mm)	(7.62 mm)	(38.10 mm)	(50.8 mm)	(7.62 mm)	29"	36" (914.40 mm)
EEFX948	700002060048									41"	48" (1219.2 mm)
EEFX972	700002060072									65"	72" (1828.8 mm)

#### Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: [inquiry@vlt.nl](mailto:inquiry@vlt.nl), Website: [www.vlt.nl](http://www.vlt.nl)

Trade register No. 17150044, VAT No. NL8112.30.946.B01