




BXIUV - Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 347°F

| Model | Part # | A | B | C | D | E | F | G | L |
|-----------|--------------|-------------------|-------------------|-------------------|--------------------|-------------------|-------------------|------------------|------------------------------------|
| BXIUV6120 | 002014006120 | .062" (1.59mm) | .187" (4.75mm) | .286" (7.23mm) | .203" (5.15 mm) | .286" (7.23mm) | .187" (4.75mm) | .50" (12.7mm) | 24" (609.60 mm) 36" (914.40 mm) |
| BXIUV824 | 002014008024 | .125" (3.18mm) | .187" (4.75mm) | .375" (9.52mm) | .345" (8.76mm) | .375" (9.52mm) | .187" (4.75mm) | .50" (12.7mm) | 24" (609.60 mm) |
| BXIUV836 | 002014008036 | | | | | | | | 36" (914.40 mm) |
| BXIUV860 | 002014008060 | | | | | | | | 60" (1524.0 mm) |
| BXIUV884 | 002014008084 | | | | | | | | 84" (2133.6 mm) |
| BXIUV424 | 002014004036 | .250" (6.35mm) | .312" (7.92mm) | .615" (15.6mm) | .560" (14.22mm) | .615" (15.6mm) | .312" (7.92mm) | .50" (12.7mm) | 24" (609.60 mm) |
| BXIUV436 | 002014004036 | | | | | | | | 36" (914.40 mm) |
| BXIUV448 | 002014004048 | | | | | | | | 48" (1219.2 mm) |
| BXIUV460 | 002014004060 | | | | | | | | 60" (1524.0 mm) |

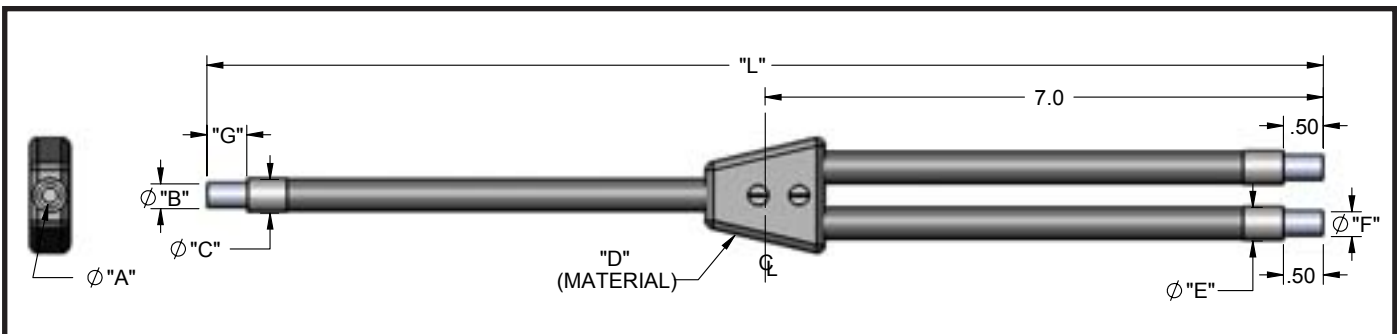

EIUUV - Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

| Model | Part # | A | B | C | D | E | F | G | L |
|----------|--------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------|------------------|---|
| EIUUV624 | 002022006024 | .062" (1.59mm) | .187" (4.75mm) | .253" (6.42mm) | PVC Heat Shrink | .205" (5.2mm) | .187" (4.75mm) | .50" (12.7mm) | 24" (609.60 mm) 36" (914.40 mm) |
| EIUUV636 | 002022006036 | .125" (3.18mm) | .187" (4.75mm) | .312" (7.92mm) | PVC Heat Shrink | .253" (6.42mm) | .187" (4.75mm) | .50" (12.7mm) | 24" (609.60 mm) |
| EIUUV824 | 002022008024 | | | | | | | | 36" (914.40 mm) |
| EIUUV424 | 002022004024 | | | | | | | | 48" (1219.2 mm) |
| EIUUV436 | 002022004036 | | | | | | | | 60" (1524.0 mm) |
| EIUUV448 | 002022004048 | .250" (6.35mm) | .312" (7.92mm) | .468" (11.9mm) | PVC Heat Shrink | .422" (10.7mm) | .312" (7.92mm) | .50" (12.7mm) | 24" (609.60 mm) 36" (914.40 mm) 48" (1219.2 mm) |

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01