


EF - 0.55NA Glass Fibers, Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

| Model | Part # | A | B | C | D | E | F | G | H | I | J | L |
|-------|--------------|-----------|-----------|-----------|------------|-----------|------------|-----------|-----------|-----------|------------|-----------------|
| EF612 | 002122211012 | | | | | | | | | | | 12" (304.80 mm) |
| EF624 | 002122211024 | | | | | | | | | | | 24" (609.60 mm) |
| EF636 | 002122211036 | .044 | .154 | .020 | .500 | .190 | .750 | .207 | .750 | .190 | 7.00 | 36" (914.40 mm) |
| EF655 | 002122211055 | (1.12 mm) | (3.91 mm) | (.51 mm) | (12.7 mm) | (5.84 mm) | (19.05 mm) | (6.35 mm) | (19.05mm) | (5.84 mm) | (177.8 mm) | 55" (1397.0 mm) |
| EF660 | 002122211060 | | | | | | | | | | | 60" (1524.0 mm) |
| EF665 | 002122211065 | | | | | | | | | | | 65" (1651.0 mm) |
| EF672 | 002122211072 | | | | | | | | | | | 72" (1828.8mm) |
| EF824 | 002122308024 | | | | | | | | | | | 24" (609.60 mm) |
| EF836 | 002122308036 | .088 | .382 | .032 | .750 | .220 | 1.00 | .250 | .750 | .220 | 7.00 | 36" (914.40 mm) |
| EF848 | 002122308048 | (2.24 mm) | (9.70 mm) | (.81 mm) | (19.05 mm) | (5.59 mm) | (25.4 mm) | (6.35 mm) | (19.05mm) | (5.59 mm) | (177.8 mm) | 48" (1219.2 mm) |
| EF860 | 002122308060 | | | | | | | | | | | 60" (1524.0 mm) |
| EF872 | 002122308072 | | | | | | | | | | | 72" (1828.8mm) |
| EF924 | SK95540024 | .138 | 1.50 | .010 | 1.00 | .300 | 1.50 | | 2.00 | .300 | 7.00 | 24" (609.60 mm) |
| EF936 | SK95540036 | (3.51mm) | (38.10mm) | (.254 mm) | (25.4 mm) | (7.62 mm) | (38.10mm) | | (50.8 mm) | (7.62 mm) | (177.8 mm) | 36" (914.40 mm) |

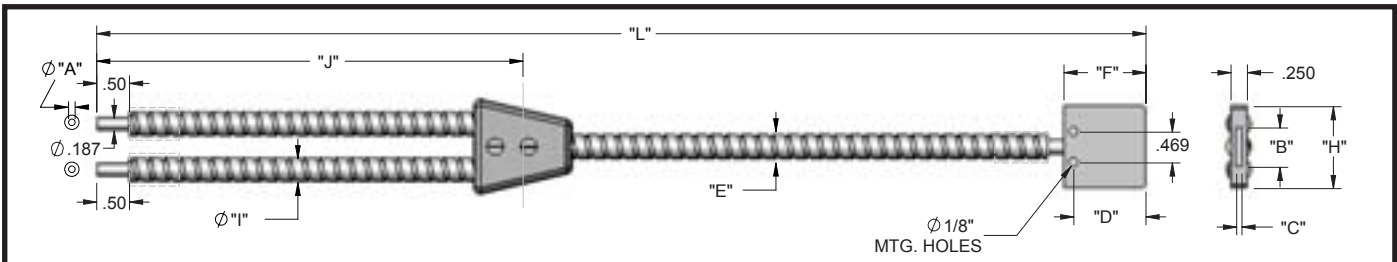

EFX & EEFX - 0.55NA Glass Fibers, Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

| Model | Part # | A | B | C | D | E | F | H | I | J | L |
|---------|--------------|-----------|------------|-----------|------------|-----------|------------|------------|-----------|------------|-----------------|
| EFX612 | 002124306012 | | | | | | | | | | 12" (304.80 mm) |
| EFX624 | 002124306024 | | | | | | | | | | 24" (609.60 mm) |
| EFX636 | 002124306036 | .044 | .154 | .020 | .500 | .203 | .750 | .750 | .203 | 7.00 | 36" (914.40 mm) |
| EFX648 | 002124306048 | (1.12 mm) | (3.91 mm) | (.51 mm) | (12.7 mm) | (5.16 mm) | (19.05 mm) | (19.05 mm) | (5.16 mm) | (177.8 mm) | 48" (1219.2 mm) |
| EFX672 | 002124306072 | | | | | | | | | | 72" (1828.8 mm) |
| EFX824 | 002124308024 | | | | | | | | | | 24" (609.60 mm) |
| EFX836 | 002124308036 | .088 | .382 | .032 | .750 | .244 | 1.00 | .750 | .244 | 7.00 | 36" (914.40 mm) |
| EFX848 | 002124308048 | (2.24 mm) | (9.70 mm) | (.81 mm) | (19.05 mm) | (6.20 mm) | (25.4 mm) | (19.05 mm) | (6.20 mm) | (177.8 mm) | 48" (1219.2 mm) |
| EFX860 | 002124308060 | | | | | | | | | | 60" (1524.0 mm) |
| EFX872 | 002124308072 | | | | | | | | | | 72" (1828.8mm) |
| EFX896 | 002124308096 | | | | | | | | | | 96" (2438.4mm) |
| EEFX918 | 700002060018 | | | | | | | | | 11" | 18"(457.20 mm) |
| EEFX924 | 700002060024 | | | | | | | | | 17" | 24" (609.60 mm) |
| EEFX936 | 700002060036 | .138 | 1.50 | .010 | 1.00 | .300 | 1.50 | 2.00 | .300 | 29" | 36" (914.40 mm) |
| EEFX948 | 700002060048 | (3.51 mm) | (38.10 mm) | (.254 mm) | (25.4 mm) | (7.62 mm) | (38.10 mm) | (50.8 mm) | (7.62 mm) | 41" | 48" (1219.2 mm) |
| EEFX972 | 700002060072 | | | | | | | | | 65" | 72" (1828.8mm) |

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01