


"B/E" Type with PVC Covered Monocoil Sheathing

Temperature Rating: -40° to 225°F
Fiber Size: 0.002Ø (0.001Ø)
N.A.: 0.55
Acceptance Cone: 68°
Spectral Response: 400nm to 2.0 microns
Proximal Tip: See page 3 or 4 for specifications

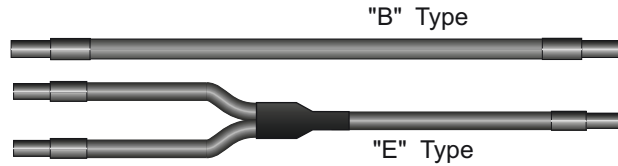

SPECIFICATIONS

	SALES CODE	AØ	DØ	EØ	OAL
	*MY2724	0.032"	0.207"	0.190"	24"
	_MY2736 _MY2772				36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_LS33224	0.094"	0.250"	0.190"	24"
	_LS33236 _LS33272				36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_LT624	0.063"	0.250"	0.230"	24"
	_LT636 _LT672				36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_L624T	0.063"	0.250"	0.230"	24"
	_L636T _L672T				36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_L824T	0.125"	0.250"	0.230"	24"
	_L836T _L872T				36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_L524T	0.156"	0.312"	0.268"	24"
	_L536T _L572T				36" 72"

*NOTE: Add "B" for Thru-Beam (single leg), "E" for Reflective (dual leg)
 **Add "P" for heat shrink transition instead of metal