
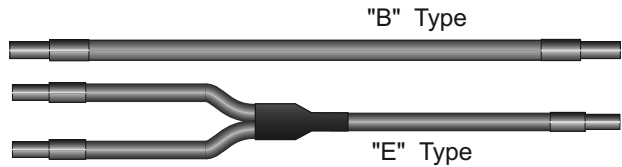


# PVC Monocoil Sheathing

## "B/E" Type with PVC Covered Monocoil Sheathing

**Temperature Rating:** -40° to 225°F  
**Fiber Size:** 0.002Ø (  0.001Ø)  
**N.A.:** 0.55  
**Acceptance Cone:** 68°  
**Spectral Response:** 400nm to 2.0 microns  
**Proximal Tip:** See page 3 or 4 for specifications



### DISTAL TIP DESIGN

### SPECIFICATIONS

	<b>SALES CODE</b>	<b>Aø</b>	<b>Dø</b>	<b>Eø</b>	<b>OAL</b>
	*L624 _L636 _L672	0.063"	0.250"	0.230"	24" 36" 72"
	L824 _L836 _L872	0.125"	0.250"	0.230"	24" 36" 72"
	<b>SALES CODE</b>	<b>Aø</b>	<b>Dø</b>	<b>Eø</b>	
	_M624 _M636 _M672	0.063"	0.250"	0.230"	24" 36" 72"
	_M824 _M836 _M872	0.125"	0.250"	0.230"	24" 36" 72"
	<b>SALES CODE</b>	<b>Aø</b>	<b>Dø</b>	<b>Eø</b>	<b>OAL</b>
	_Y2724 _Y2736 _Y2772	0.032"	0.207"	0.190"	24" 36" 72"
	_Y4124 _Y4136 _Y4172	0.041"	0.207"	0.190"	24" 36" 72"
	<b>SALES CODE</b>	<b>Aø</b>	<b>Dø</b>	<b>Eø</b>	<b>OAL</b>
	_LY2724 _LY2736 _LY2772	0.032"	0.207"	0.190"	24" 36" 72"
	_LY4124 _LY4136 _LY4172	0.041"	0.207"	0.190"	24" 36" 72"
	<b>SALES CODE</b>	<b>Aø</b>	<b>Dø</b>	<b>Eø</b>	<b>OAL</b>
	_LY6324 _LY6336 _LY6372	0.063"	0.207"	0.190"	24" 36" 72"

\*NOTE: Add "B" for Thru-Beam (single leg), "E" for Reflective (dual leg)

\*\*Add "P" for heat shrink transition instead of metal