
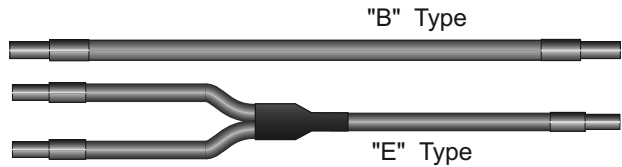


PVC Monocoil Sheathing

"B/E" Type with PVC Covered Monocoil Sheathing

Temperature Rating: -40° to 225°F
Fiber Size: 0.002Ø ( 0.001Ø)
N.A.: 0.55
Acceptance Cone: 68°
Spectral Response: 400nm to 2.0 microns
Proximal Tip: See page 3 or 4 for specifications



DISTAL TIP DESIGN

SPECIFICATIONS

	SALES CODE	AØ	DØ	EØ	OAL
	*L624 _L636 _L672	0.063"	0.250"	0.230"	24" 36" 72"
	L824 _L836 _L872	0.125"	0.250"	0.230"	24" 36" 72"
	SALES CODE	AØ	DØ	EØ	
	_M624 _M636 _M672	0.063"	0.250"	0.230"	24" 36" 72"
	_M824 _M836 _M872	0.125"	0.250"	0.230"	24" 36" 72"
<p> Type 27:0.043 Type 41:0.059 Type 63:0.083 </p>	SALES CODE	AØ	DØ	EØ	OAL
	_Y2724 _Y2736 _Y2772	0.032"	0.207"	0.190"	24" 36" 72"
	_Y4124 _Y4136 _Y4172	0.041"	0.207"	0.190"	24" 36" 72"
<p> Type 27:0.035"R Type 41:0.125"R Type 63:0.125"R </p> <p> Type 27:0.043"Ø Type 41:0.059"Ø Type 63:0.083"Ø </p> <p> 27:0.188" 41:0.375" 63:0.375" </p>	SALES CODE	AØ	DØ	EØ	OAL
	_LY2724 _LY2736 _LY2772	0.032"	0.207"	0.190"	24" 36" 72"
	_LY4124 _LY4136 _LY4172	0.041"	0.207"	0.190"	24" 36" 72"
	SALES CODE	AØ	DØ	EØ	OAL
	_LY6324 _LY6336 _LY6372	0.063"	0.207"	0.190"	24" 36" 72"
	_LY4124 _LY4136 _LY4172	0.041"	0.207"	0.190"	24" 36" 72"

*NOTE: Add "B" for Thru-Beam (single leg), "E" for Reflective (dual leg)

**Add "P" for heat shrink transition instead of metal