





# Small Line Lights, Light to Circle Guides

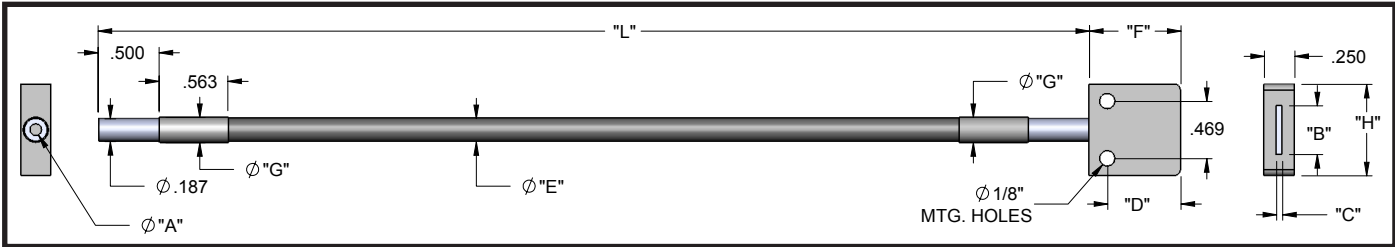


## **BF** - 0.55NA Glass Fibers, Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

Model	Part #	A	B	C	D	E	F	G	H	L
BF624	002112306024									24" (609.60 mm)
BF636	002112306036	.063	.154	.020	.500	.190	.750	.207	.750	36" (914.40 mm)
BF648	002112306048	(1.60 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.84 mm)	(19.05 mm)	(6.35 mm)	(19.05mm)	48" (1219.2 mm)
BF672	002112306072									72" (1828.8mm)
BF824	002112308024									24" (609.60 mm)
BF836	002112308036									36" (914.40 mm)
BF848	002112308048	.125	.382	.032	.750	.230	1.00	.250	.750	48" (1219.2 mm)
BF860	002112308060	(3.18 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(5.84 mm)	(25.4 mm)	(6.35 mm)	(19.05mm)	60" (1524.0 mm)
BF872	002112308072									72" (1828.80mm)
BF896	002112308096									96" (2438.4mm)
BF8120	002112308120									120" (3048.0mm)
BF924	SK77190024	.138	1.50	.010	1.00	.300	1.50	-	2.00	24" (609.60 mm)
BF936	SK77190036	(3.51 mm)	(38.10mm)	(.254 mm)	(25.4 mm)	(7.62 mm)	(38.10mm)	-	(50.8 mm)	36" (914.40 mm)

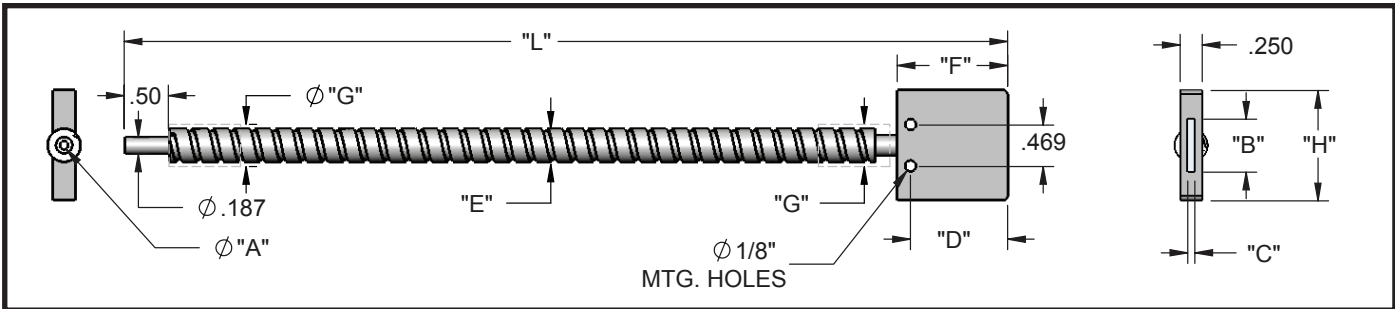


## **BFX** - 0.55NA Glass Fibers, Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

Model	Part #	A	B	C	D	E	F	G	H	L
BFX624	002114306024									24" (609.60 mm)
BFX636	002114306036	.063	.154	.020	.500	.203	.750	-	.750	36" (914.40 mm)
BFX648	002114306048	(1.60 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.16 mm)	(19.05 mm)	-	(19.05mm)	48" (1219.2 mm)
BFX672	002114306072									72" (1828.80mm)
BFX6120	002114306120									120" (3048.0mm)
BFX824	002114308024									24" (609.60 mm)
BFX836	002114308036									36" (914.40 mm)
BFX848	002114308048	.125	.382	.032	.750	.244	1.00	-	.750	48" (1219.2 mm)
BFX860	002114308060	(3.18 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(6.20 mm)	(25.4 mm)	-	(19.05mm)	60" (1524.0 mm)
BFX872	002114308072									72" (1828.80mm)
BFX8180	002114308180									180" (4572.0mm)
BFX924	002114359024	.138	1.50	.010	1.00	.300	1.50	-	2.00	24" (609.60 mm)
BFX936	002114359036	(3.51 mm)	(38.10mm)	(.254mm)	(25.4 mm)	(7.62 mm)	(38.10mm)	-	(50.8 mm)	36" (914.40 mm)
BFX948	002114359048									48" (1219.2 mm)
BFX972	002114359072									72" (1828.80mm)

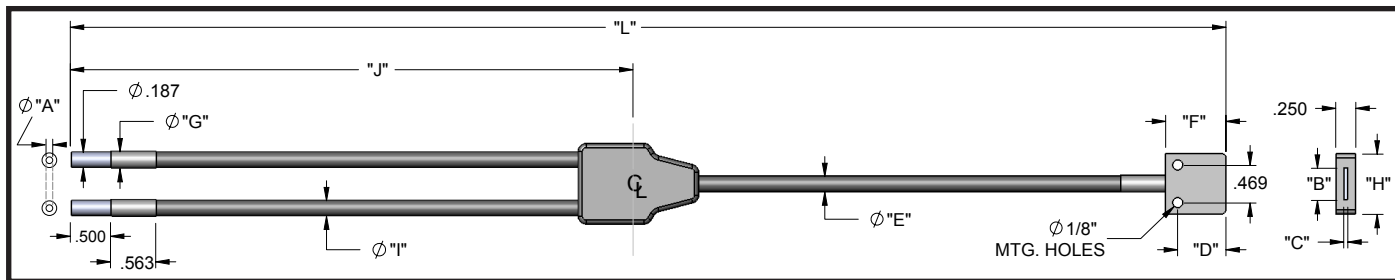

### EF - 0.55NA Glass Fibers, Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

Model	Part #	A	B	C	D	E	F	G	H	I	J	L
EF612	002122211012											12" (304.80 mm)
EF624	002122211024											24" (609.60 mm)
EF636	002122211036	.044	.154	.020	.500	.190	.750	.207	.750	.190	7.00	36" (914.40 mm)
EF655	002122211055	(1.12 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.84 mm)	(19.05 mm)	(6.35 mm)	(19.05 mm)	(5.84 mm)	(177.8 mm)	55" (1397.0 mm)
EF660	002122211060											60" (1524.0 mm)
EF665	002122211065											65" (1651.0 mm)
EF672	002122211072											72" (1828.8 mm)
EF824	002122308024											24" (609.60 mm)
EF836	002122308036	.088	.382	.032	.750	.220	1.00	.250	.750	.220	7.00	36" (914.40 mm)
EF848	002122308048	(2.24 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(5.59 mm)	(25.4 mm)	(6.35 mm)	(19.05 mm)	(5.59 mm)	(177.8 mm)	48" (1219.2 mm)
EF860	002122308060											60" (1524.0 mm)
EF872	002122308072											72" (1828.8 mm)
EF924	SK95540024	.138	1.50	.010	1.00	.300	1.50	-	2.00	.300	7.00	24" (609.60 mm)
EF936	SK95540036	(3.51 mm)	(38.10 mm)	(.254 mm)	(25.4 mm)	(7.62 mm)	(38.10 mm)		(50.8 mm)	(7.62 mm)	(177.8 mm)	36" (914.40 mm)

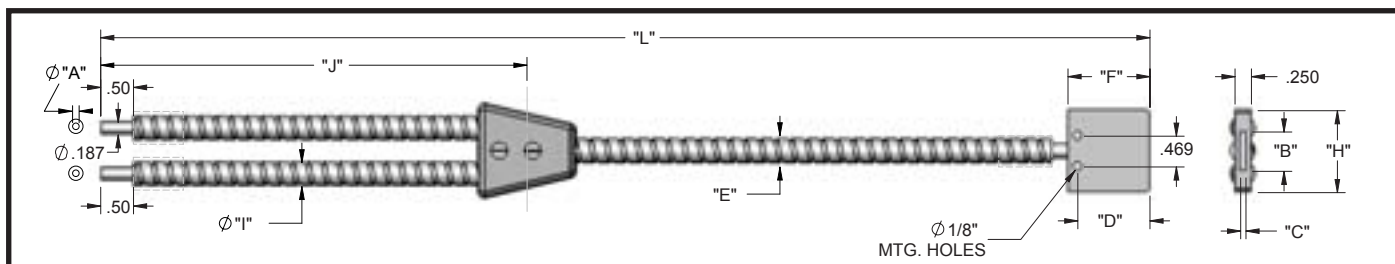

### EFX & EEFX - 0.55NA Glass Fibers, Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

Model	Part #	A	B	C	D	E	F	H	I	J	L	
EFX612	002124306012											12" (304.80 mm)
EFX624	002124306024											24" (609.60 mm)
EFX636	002124306036	.044	.154	.020	.500	.203	.750	.750	.203	7.00		36" (914.40 mm)
EFX648	002124306048	(1.12 mm)	(3.91 mm)	(.51 mm)	(12.7 mm)	(5.16 mm)	(19.05 mm)	(19.05 mm)	(5.16 mm)	(177.8 mm)		48" (1219.2 mm)
EFX672	002124306072											72" (1828.8 mm)
EFX824	002124308024											24" (609.60 mm)
EFX836	002124308036	.088	.382	.032	.750	.244	1.00	.750	.244	7.00		36" (914.40 mm)
EFX848	002124308048	(2.24 mm)	(9.70 mm)	(.81 mm)	(19.05 mm)	(6.20 mm)	(25.4 mm)	(19.05 mm)	(6.20 mm)	(177.8 mm)		48" (1219.2 mm)
EFX860	002124308060											60" (1524.0 mm)
EFX872	002124308072											72" (1828.8 mm)
EFX896	002124308096											96" (2438.4 mm)
EEFX918	700002060018										11"	18" (457.20 mm)
EEFX924	700002060024	.138	1.50	.010	1.00	.300	1.50	2.00	.300		17"	24" (609.60 mm)
EEFX936	700002060036	(3.51 mm)	(38.10 mm)	(.254 mm)	(25.4 mm)	(7.62 mm)	(38.10 mm)	(50.8 mm)	(7.62 mm)		29"	36" (914.40 mm)
EEFX948	700002060048										41"	48" (1219.2 mm)
EEFX972	700002060072										65"	72" (1828.8 mm)

#### Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: [inquiry@vlt.nl](mailto:inquiry@vlt.nl), Website: [www.vlt.nl](http://www.vlt.nl)

Trade register No. 17150044, VAT No. NL8112.30.946.B01