


## E - Bifurcated Light Guide, Randomized, PVC Monocoil Sheathing, Rated for -40°F to 225°F

| Model | Part #       | A               | B               | C               | D               | E               | F               | G              | L               |
|-------|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|
| E624  | 002122006024 |                 |                 |                 |                 |                 |                 |                | 24" (609.6 mm)  |
| E636  | 002122006036 |                 | .187" (4.75 mm) | .205" (5.2 mm)  | PVC Heat Shrink | .205" (5.2 mm)  | .187" (4.75 mm) | .50" (12.7 mm) | 36" (914.4 mm)  |
| E648  | 002122006048 | .063" (1.60 mm) | .187" (4.75 mm) | .205" (5.2 mm)  | PVC Heat Shrink | .205" (5.2 mm)  | .187" (4.75 mm) | .50" (12.7 mm) | 48" (1219.2 mm) |
| E660  | 002122006060 |                 |                 |                 |                 |                 |                 |                | 60" (1523 mm)   |
| E672  | 002122006072 |                 |                 |                 |                 |                 |                 |                | 72" (1828.8 mm) |
| E824  | 002122008024 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 24" (609.6 mm)  |
| E836  | 002122008036 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 36" (914.4 mm)  |
| E848  | 002122008048 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 48" (1219.2 mm) |
| E848M | 002122530048 | .125" (3.18 mm) | .588" (15 mm)   | .615" (15.6 mm) | PVC Heat Shrink | .250" (6.3 mm)  | .187" (4.75 mm) | .83" (21 mm)   | 48" (1219.2 mm) |
| E860  | 002122008060 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 60" (1523 mm)   |
| E872  | 002122008072 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 72" (1828.8 mm) |
| E896  | 002122008096 |                 | .187" (4.75 mm) | .250" (6.3 mm)  |                 |                 |                 | .50" (12.7 mm) | 96" (2438.4 mm) |
| E524  | SK95900024   | .156" (3.96 mm) | .187" (4.75 mm) | .312" (7.9 mm)  | PVC Heat Shrink | .312" (7.9 mm)  | .187" (4.75 mm) | .50" (12.7 mm) | 24" (609.6 mm)  |
| E536  | SK95900036   |                 |                 |                 |                 |                 |                 |                | 36" (914.4 mm)  |
| E572  | SK95900072   |                 |                 |                 |                 |                 |                 |                | 72" (1828.8 mm) |
| E424  | 002122007024 |                 | .312" (7.9 mm)  | .422" (10.7 mm) |                 |                 |                 | .50" (12.7 mm) | 24" (609.6 mm)  |
| E436  | 002122007036 |                 | .312" (7.9 mm)  | .422" (10.7 mm) |                 |                 |                 | .50" (12.7 mm) | 36" (914.4 mm)  |
| E448  | 002122007048 | .250" (6.3 mm)  | .312" (7.9 mm)  | .422" (10.7 mm) | PVC Heat Shrink | .422" (10.7 mm) | .312" (7.9 mm)  | .50" (12.7 mm) | 48" (1219.2 mm) |
| E448M | 002122424048 |                 | .588" (15 mm)   | .615" (15.6 mm) | PVC Heat Shrink | .422" (10.7 mm) | .312" (7.9 mm)  | .83" (21 mm)   | 48" (1219.2 mm) |
| E472  | 002122007072 |                 | .312" (7.9 mm)  | .422" (10.7 mm) |                 |                 |                 | .50" (12.7 mm) | 72" (1828.8 mm) |
| E472M | 002122424072 |                 | .588" (15 mm)   | .615" (15.6 mm) |                 |                 |                 | .83" (21 mm)   | 72" (1828.8 mm) |

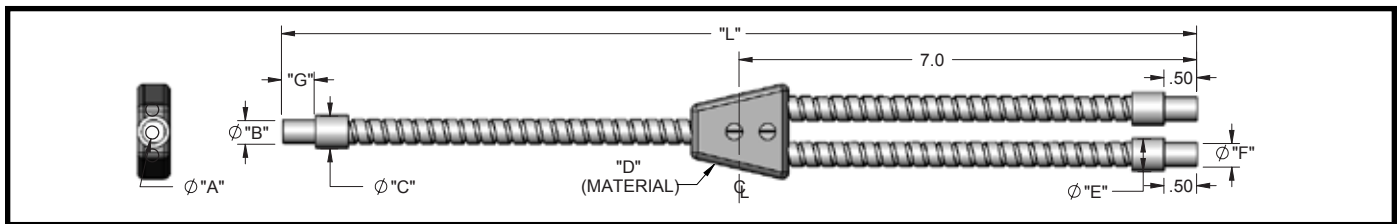

## EX - Bifurcated Light Guide, Randomized, Stainless Steel Sheathing, Rated for -40°F to 225°F

| Model | Part #       | A               | B               | C | D                | E | F               | G              | L               |
|-------|--------------|-----------------|-----------------|---|------------------|---|-----------------|----------------|-----------------|
| EX624 | 002124006024 |                 |                 |   |                  |   |                 |                | 24" (609.6 mm)  |
| EX636 | 002124006036 |                 | .187" (4.75 mm) | - | Metal Transition | - | .187" (4.75 mm) | .50" (12.7 mm) | 36" (914.4 mm)  |
| EX672 | 002124006072 | .063" (1.60 mm) | .187" (4.75 mm) | - | Metal Transition | - | .187" (4.75 mm) | .50" (12.7 mm) | 72" (1828.8 mm) |
| EX824 | 002124008024 |                 | .187" (4.75 mm) | - |                  |   |                 | .50" (12.7 mm) | 24" (609.6 mm)  |
| EX836 | 002124008036 |                 | .187" (4.75 mm) | - |                  |   |                 | .50" (12.7 mm) | 36" (914.4 mm)  |
| EX848 | 002124008048 | .125" (3.18 mm) | .187" (4.75 mm) | - | Metal Transition | - | .187" (4.75 mm) | .50" (12.7 mm) | 48" (1219.2 mm) |
| EX860 | 002124008060 |                 |                 |   |                  |   |                 |                | 60" (1523 mm)   |
| EX872 | 002124008072 |                 |                 |   |                  |   |                 |                | 72" (1828.8 mm) |
| EX424 | SK78660024   | .250" (6.3 mm)  | .312" (7.9 mm)  | - | PVC Heat Shrink  | - | .312" (7.9 mm)  | .50" (12.7 mm) | 24" (609.6 mm)  |
| EX448 | SK78660048   |                 |                 |   |                  |   |                 |                | 48" (1219.2 mm) |
| EX472 | SK78660072   |                 |                 |   |                  |   |                 |                | 72" (1828.8 mm) |



### EE - Bifurcated Light Guide, Non-Randomized, PVC Monocoil Sheathing, Rated for -40°F to 225°F

| Model  | Part #        | A                  | B                  | C                 | D               | E                  | F                  | G                 | L               |
|--------|---------------|--------------------|--------------------|-------------------|-----------------|--------------------|--------------------|-------------------|-----------------|
| EE624  | 0021220106024 |                    |                    |                   |                 |                    |                    |                   | 24" (609.6 mm)  |
| EE636  | 0021220106036 |                    |                    |                   |                 |                    |                    |                   | 36" (914.4 mm)  |
| EE660  | 0021220106060 | .063"<br>(1.60 mm) | .187"<br>(4.75 mm) | .205"<br>(5.2 mm) | PVC Heat Shrink | .205"<br>(5.2 mm)  | .187"<br>(4.75 mm) | .50"<br>(12.7 mm) | 60" (1523 mm)   |
| EE672  | 0021220106072 |                    |                    |                   |                 |                    |                    |                   | 72" (1828.8 mm) |
| EE696  | 0021220106096 |                    |                    |                   |                 |                    |                    |                   | 96" (2438.4 mm) |
| EE824  | 002122008024  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 24" (609.6 mm)  |
| EE836  | 002122008036  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 36" (914.4 mm)  |
| EE836M | 002122360036  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 36" (914.4 mm)  |
| EE848  | 002122008048  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 48" (1219.2 mm) |
| EE860  | 002122008060  | .125"<br>(3.18 mm) | .187" (4.75 mm)    | .250" (6.3 mm)    | PVC Heat Shrink | .250"<br>(6.3 mm)  | .187"<br>(4.75 mm) | .50" (12.7 mm)    | 60" (1523 mm)   |
| EE860M | 002122360060  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 60" (1523 mm)   |
| EE872  | 002122008072  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 72" (1828.8 mm) |
| EE896  | 002122008096  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 96" (2438.4 mm) |
| EE8144 | 002122008144  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 144" (3655 mm)  |
| EE8240 | 002122008240  |                    | .187" (4.75 mm)    | .250" (6.3 mm)    |                 |                    |                    | .50" (12.7 mm)    | 240" (6096 mm)  |
| EE412  | 002122014012  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 12" (305 mm)    |
| EE424  | 002122014024  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 24" (609.6 mm)  |
| EE424M | 002122340024  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 24" (609.6 mm)  |
| EE436  | 002122014036  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 36" (914.4 mm)  |
| EE436M | 002122340036  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 36" (914.4 mm)  |
| EE448  | 002122014048  | .250"<br>(6.3 mm)  | .312" (7.9 mm)     | .422" (10.7 mm)   | PVC Heat Shrink | .422"<br>(10.7 mm) | .312"<br>(7.9 mm)  | .50" (12.7 mm)    | 48" (1219.2 mm) |
| EE448M | 002122340048  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 48" (1219.2 mm) |
| EE460  | 002122014060  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 60" (1523 mm)   |
| EE460M | 002122340060  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 60" (1523 mm)   |
| EE472  | 002122014072  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 72" (1828.8 mm) |
| EE472M | 002122340072  |                    | .588" (15 mm)      | .615" (15.6 mm)   |                 |                    |                    | .83" (21 mm)      | 72" (1828.8 mm) |
| EE496  | 002122014096  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 96" (2438.4 mm) |
| EE4120 | 002122014120  |                    | .312" (7.9 mm)     | .422" (10.7 mm)   |                 |                    |                    | .50" (12.7 mm)    | 120" (3048 mm)  |



### EEX - Bifurcated Light Guide, Non-Randomized, Stainless Steel Sheathing, Rated for -40°F to 225°F

| Model  | Part #       | A                  | B               | C | D                | E | F                  | G              | L               |
|--------|--------------|--------------------|-----------------|---|------------------|---|--------------------|----------------|-----------------|
| EEX836 | SK78130036   | .125"<br>(3.18 mm) | .187" (4.75 mm) | - | Metal Transition | - | .187"<br>(4.75 mm) | .50" (12.7 mm) | 36" (914.4 mm)  |
| EEX524 | 002124075024 | .156"<br>(3.96 mm) | .187" (4.75 mm) | - | Metal Transition | - | .187"<br>(4.75 mm) | .50" (12.7 mm) | 24" (609.6 mm)  |
| EEX448 | SK80080048   |                    | .312" (7.9 mm)  | - | PVC Heat Shrink  | - | .312"<br>(7.9 mm)  | .50" (12.7 mm) | 48" (1219.2 mm) |
| EEX460 | SK80080060   | .250"<br>(6.3 mm)  | .312" (7.9 mm)  | - | PVC Heat Shrink  | - | .312"<br>(7.9 mm)  | .50" (12.7 mm) | 60" (1523 mm)   |
| EEX472 | SK80080072   |                    | .312" (7.9 mm)  | - | PVC Heat Shrink  | - | .312"<br>(7.9 mm)  | .50" (12.7 mm) | 72" (1828.8 mm) |
| EEX496 | SK80080096   |                    | .312" (7.9 mm)  | - | PVC Heat Shrink  | - | .312"<br>(7.9 mm)  | .50" (12.7 mm) | 96" (2438.4 mm) |

#### Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01