



BY & EY Series Light Guides

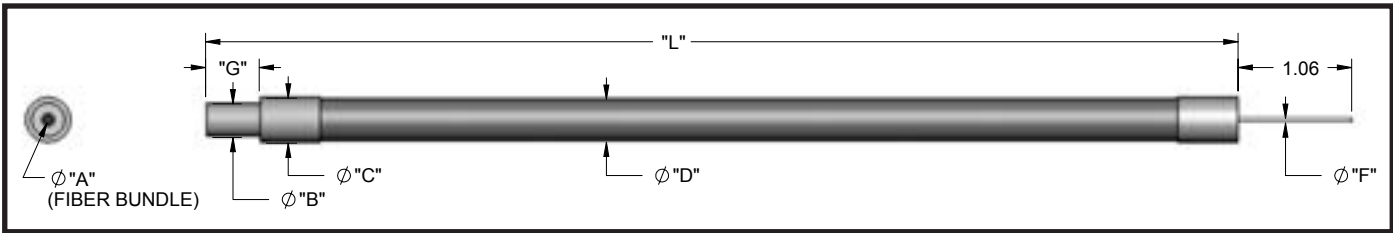


BY - Small Dia. Hypo-Tubing End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
BY2724	002112233024	.032"	.187" (4.75 mm)	.205" (5.2 mm)	.190"	.205"	.043"	.50" (12.7 mm)	24" (609.6 mm)
BY2724M	002112530024	(.81 mm)	.588" (15 mm)	.615" (15.6 mm)	(4.8 mm)	(5.2 mm)	(1.09 mm)	.833" (21 mm)	24" (609.6 mm)
BY2748	002112233048		.187" (4.75 mm)	.205" (5.2 mm)				.50" (12.7 mm)	48" (1219.2 mm)
BY4136	002112293036	.041"	.187"	.205"	.190"	.205"	.059"	.50"	36" (914.4 mm)
BY4172	002112293072	(1.04 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(1.5 mm)	(12.7 mm)	72" (1828.8 mm)
BY6336	002112213036	.063"	.187"	.205"	.190"	.205"	.083"	.50"	36" (914.4 mm)
BY6348	002112213048	(1.6 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(2.1 mm)	(12.7 mm)	48" (1219.2 mm)
BY6372	002112213072								72" (1828.8 mm)

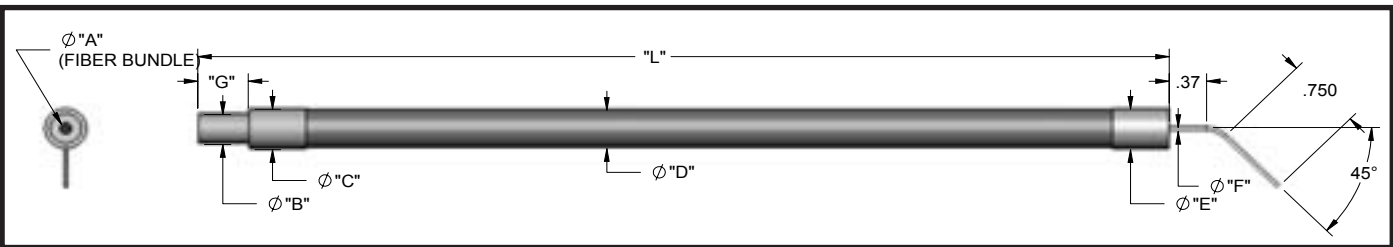


BMJ - 45° Bend Hypo-Tubing End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
BMJ2736	002112231036	.063"	.187" (4.75 mm)	.205"	.190"	.205"	.043"	.50"	36" (914.4 mm)
BMJ4136	002112291036	(1.60 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(1.09 mm)	(12.7 mm)	36" (914.4 mm)
BMJ4136	002112291036	.125"	.187" (4.75 mm)	.205"	.190"	.205"	.059"	.50"	36" (914.4 mm)
BMJ4136	002112291036	(3.18 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(1.5 mm)	(12.7 mm)	36" (914.4 mm)
BMJ6336	002112211036	.156"	.187"	.205"	.190"	.205"	.083"	.50"	36" (914.4 mm)
BMJ6372	002112211072	(3.96 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(2.1 mm)	(12.7 mm)	72" (1828.8 mm)

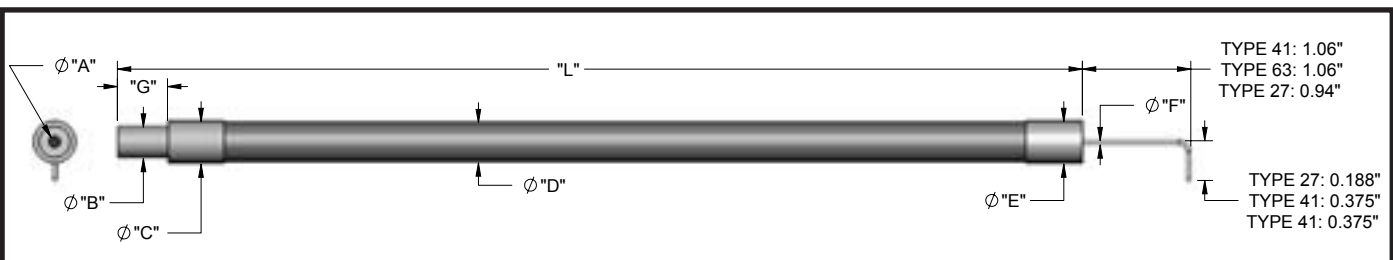


BLY - 90° Bend Hypo-Tubing End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
BLY2724	002112232024	.063"	.187" (4.75 mm)	.205"	.190"	.205"	.043"	.50"	24" (609.6 mm)
BLY2748	002112232048	(1.60 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(1.09 mm)	(12.7 mm)	48" (1219.2 mm)
BLY4124	002112292024	.125"	.187" (4.75 mm)	.205" (5.2 mm)	.190"	.205"	.059"	.50" (12.7 mm)	24" (609.6 mm)
BLY4124M	700012690024	(3.18 mm)	(4.75 mm)	.615" (15.6 mm)	(4.8 mm)	(5.2 mm)	(1.5 mm)	.833" (21 mm)	24" (609.6 mm)
BLY4148	002112292048			.205" (5.2 mm)				.50" (12.7 mm)	48" (1219.2 mm)
BLY6336	002112212036	.156"	.187"	.205"	.190"	.205"	.083"	.50"	36" (914.4 mm)
BLY6372	002112212072	(3.96 mm)	(4.75 mm)	(5.2 mm)	(4.8 mm)	(5.2 mm)	(2.1 mm)	(12.7 mm)	72" (1828.8 mm)

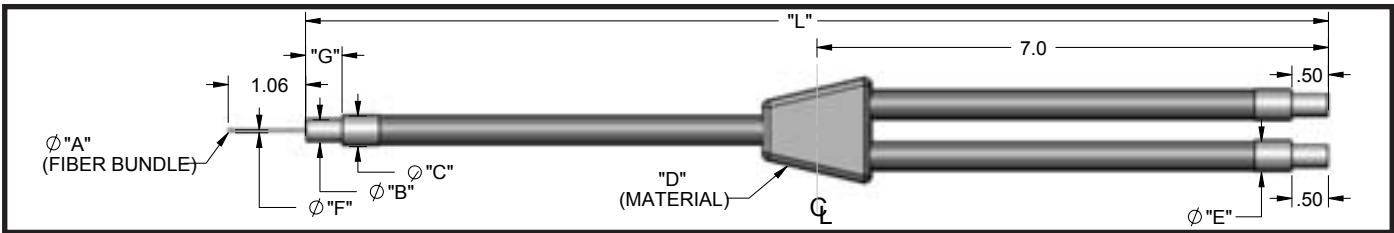


EY - Small Dia. Hypo-Tubing End Ferrule, Randomized, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
EY2724	002122233024	.032"	.187"	.205"	PVC Heat Shrink	.205"	.043"	.50"	24" (609.6 mm)
EY2748	002122233048	(.81 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.09 mm)	(12.7 mm)	48" (1219.2 mm)
EY2772	002122233072								72" (1828.8 mm)
EY4136	002122283036	.041"	.187"	.205"	PVC Heat Shrink	.205"	.059"	.50"	36" (914.4 mm)
		(1.04 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.5 mm)	(12.7 mm)	
EY6324	002122213024	.063"	.187"	.205"	PVC Heat Shrink	.205"	.083"	.50"	24" (609.6 mm)
EY6336	002122213036	(1.6 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(2.1 mm)	(12.7 mm)	36" (914.4 mm)
EY6372	002122213072								72" (1828.8 mm)

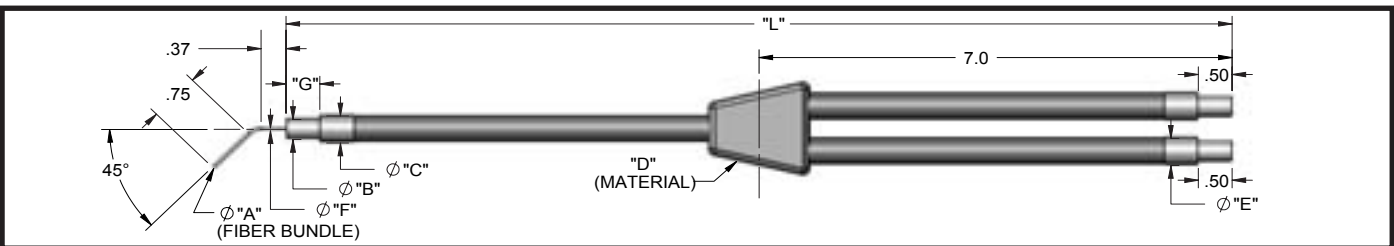

EMY - 45° Bend Hypo-Tubing End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
EMY2736	002122232036	.063"	.187"	.205"	PVC Heat Shrink	.205"	.043"	.50"	36" (914.4 mm)
EMY2772	002122232072	(1.60 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.09 mm)	(12.7 mm)	72" (1828.8 mm)
EMY4136	002122281036	.125"	.187"	.205"	PVC Heat Shrink	.205"	.059"	.50"	36" (914.4 mm)
		(3.18 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.5 mm)	(12.7 mm)	
EMY6336	002122211036	.156"	.187"	.205"	PVC Heat Shrink	.205"	.083"	.50"	36" (914.4 mm)
		(3.96 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(2.1 mm)	(12.7 mm)	

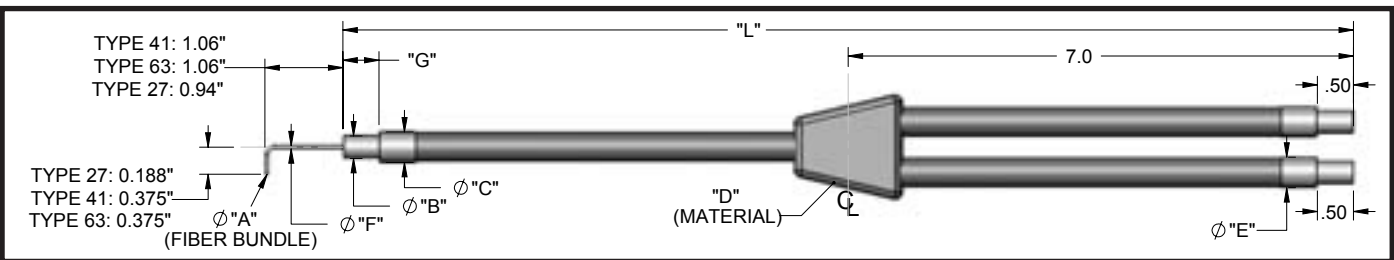

ELY - 90° Bend Hypo-Tubing End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 225°F

Model	Part #	A	B	C	D	E	F	G	L
ELY2724	002122231024	.063"	.187"	.205"	PVC Heat Shrink	.205"	.043"	.50"	24" (609.6 mm)
ELY2736	002122231036	(1.60 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.09 mm)	(12.7 mm)	36" (914.4 mm)
ELY4124	002122282024	.125"	.187"	.205"	PVC Heat Shrink	.205"	.059"	.50"	24" (609.6 mm)
ELY4136	002122282048	(3.18 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(1.5 mm)	(12.7 mm)	36" (914.4 mm)
ELY6324	002122212024	.156"	.187"	.205"	PVC Heat Shrink	.205"	.083"	.50"	24" (609.6 mm)
ELY6336	002122212036	(3.96 mm)	(4.75 mm)	(5.2 mm)		(5.2 mm)	(2.1 mm)	(12.7 mm)	36" (914.4 mm)
ELY6348	002122212048								48" (1219.2 mm)

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01