

Metaphase LED Washdown Spot

Model#: FR-SL205



- Low Cost
- Swivel Bracket allows for precise positioning
- Easy Mounting
- Washdown
- 6x brighter than incandescent bulb
- Low Power Energy Consumption
- IP65 rating
- 6x brighter than Halogen lamp spotlights

Dimensions

4.57in x 4.03in x 3.08in
116mm x 102mm x 78mm

Contact Us:

Contact your Metaphase Technologies Representative for options including: Filter Options, Power Options, & Wavelength.

Specifications:

Current Consumption	0.83A
Finish	Black Anodized
Color Temperature	5500K White
Weight	1LB/453g
Operating Temperature	120° F Max
Compliance	CE/RoHS
Lifetime Hours	75,000 Hours
Illuminance	725,000 Lux

Part #	Color	Power Supply
FR-SL205-W-24	White 6000K	24 volt power supply available upon request.
FR-SL205-R-24	Red 630nm	
FR-SL205-B-24	Blue 455nm	
FR-SL205-G-24	Green 530nm	

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

ORDERING INFORMATION:

• FR - SL 205 - - 24 -

W	White 5500k	N	Narrow Lens
R	Red 630nm	M	Medium Lens
G	Green 530nm	W	Wide Lens
B	Blue 455 nm		

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl


Trade register No. 17150044, VAT No. NL8112.30.946.B01

Metaphase LED Washdown Spot L

Model#: FR-SL205

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

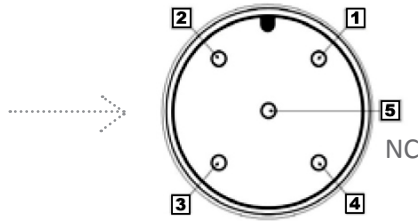

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1
When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

