



LPA Series - High gloss anodized housing, PVC coated metal hose sheathing

Fits: 60- 66mm Objectives Mounting: 3 Thumb Screws Working Distance: 1.5in. - 9.0in.

Model	Part #	Cable Length (in.)	End Tip Dia. (in.)	Light Source Adapter for .590 (15mm) Input	Light Source Adapter for 1.00 (25mm) Input	Optional Polarizer
LPA36M	002190140036	36	.588	Direct Fit	SX-13	LP-PLZ
LPA36	700014800036	36	.562	N/A	SX-10	LP-PLZ
LPA48M	002190140048	48	.588	Direct Fit	SX-13	LP-PLZ
LPA72M	002190140072	72	.588	Direct Fit	SX-13	LP-PLZ

LP25A Series - High gloss anodized housing, PVC coated metal hose sheathing

Fits: 60- 66mm Objectives Mounting: 3 Thumb Screws Working Distance: 1.5in. - 9.0in.

Model	Part #	Cable Length (in.)	End Tip Dia. (in.)	Light Source Adapter for .590 (15mm) Input	Light Source Adapter for 1.00 (25mm) Input	Optional Polarizer
LP25A36M	002190170036	36	.588	Direct Fit	SX-13	LP-PLZ
LP25A48M	002190170048	48	.588	Direct Fit	SX-13	LP-PLZ
LP25A72M	002190170072	72	.588	Direct Fit	SX-13	LP-PLZ




Polarizers (LP-PLZ, 700009730000)




Dark Field Reflector (LP-DFR, 010090460000)

LPA Dimensions:

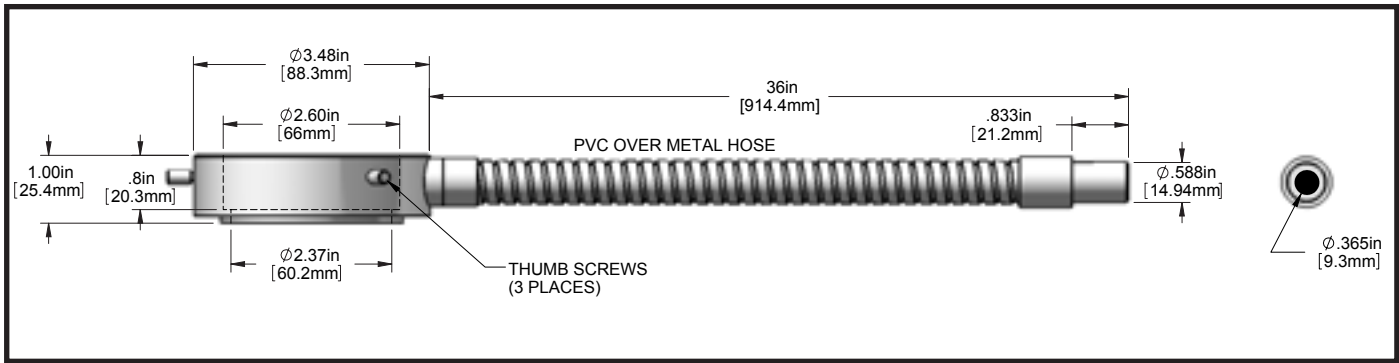

LP25A Dimensions:

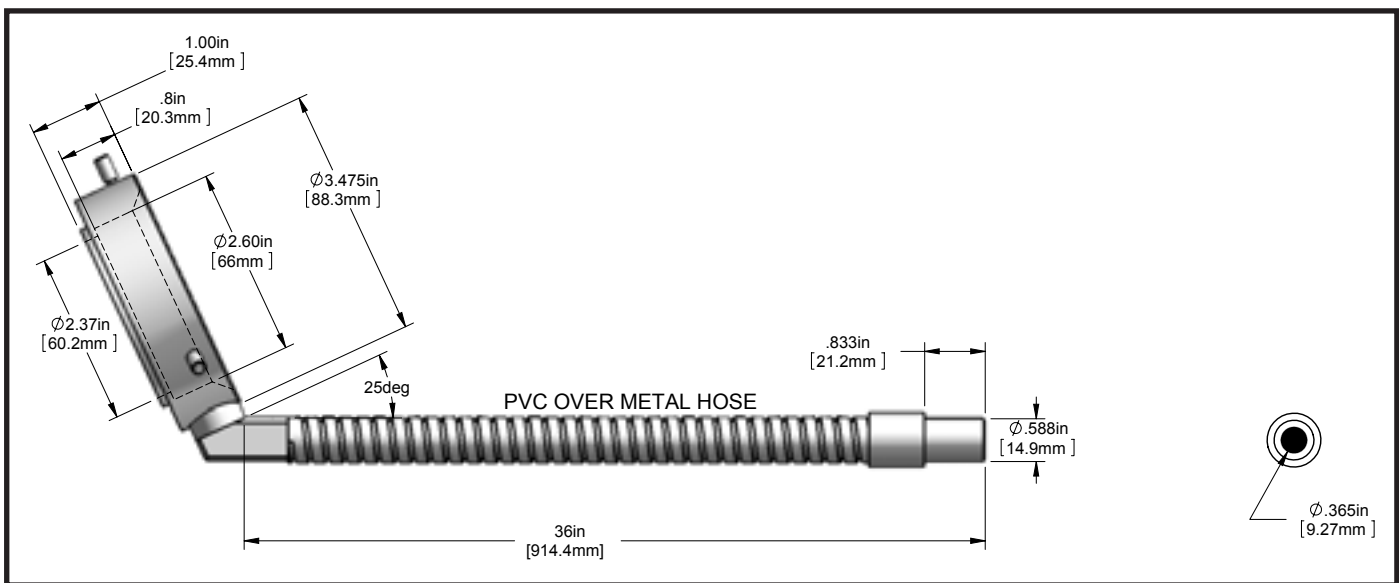

Note: Ring lights available in variety of lengths. 36 inch version shown in diagram above. Please contact Dolan-Jenner for availability on length variations. Please note two standard end ferrules available along with many custom designs.

Dolan-Jenner

industries

Dolan-Jenner Industries
159 Swanson Rd.
Dorchester, MA 01910 USA

Phone: 800.833.4237
Fax: 978.264.0292
Email: support@dolan-jenner.com

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01