

MetaBright™ Linear Front Light

Model#: MB-LFL1X4



- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
MB-LFL1X4-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	0.2A
MB-LFL1X4-R-24	Red 630nm		Housing	Aluminum
MB-LFL1X4-B-24	Blue 455nm		Finish	Anodized
MB-LFL1X4-G-24	Green 530nm		Intensity Uniformity	+/-5%
MB-LFL1X4-IRN-24	Infrared 850nm		Operating Temperature	120° F Max
MB-LFL1X4-IRL-24	Infrared 880nm		Illuminance	120,000 Lux
MB-LFL1X4-UVL-24	UV 395nm		Compliance	CE/RoHS
MB-LFL1X4-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
0.63in x 4 in 16mm x 104mm	4.33in x .86in x .86in 110mm x 22mm x 22mm

ORDERING INFORMATION:

• M B - L F L 1 X 4 - - 2 4 -

W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		
v			

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands
Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl
Trade register No. 17150044, VAT No. NL8112.30.946.B01




MetaBright™ Linear Front Light

Model#: MB-LFL1X4

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

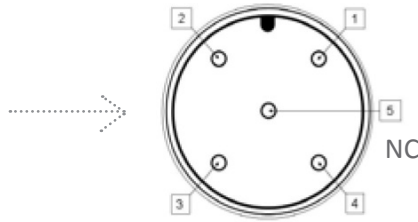

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1
When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	REDRAWN IN SOLIDWORKS, KW	3/16/2012	

ELECTRICAL CABLE, 10 FT. LG
(4) CONDUCTOR, 22 AWG
WITH FLYING LEADWIRE ENDS.

M4X0.7-6H X .25 (6.4) DP
BOTTOM TAP
(3) PLACES

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISION LIGHT TECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISION LIGHT TECH IS PROHIBITED.</p>	<p>UNLESS OTHERWISE SPECIFIED:</p> <p>DIMENSIONS ARE IN INCHES</p> <p>TOLERANCES:</p> <p>FRACTIONALS ±1/64</p> <p>ANGULAR: MACH ±2° MEND ±5°</p> <p>TWO PLACE DECIMAL ±.01</p> <p>THREE PLACE DECIMAL ±.005</p> <p>INTERPRET GEOMETRIC TOLERANCING PER:</p> <p>MATERIAL:</p> <p>FINISH:</p> <p>APPLICATION: DO NOT SCALE DRAWING</p>	<p>NAME: KW</p> <p>DATE: 3/16/2012</p> <p>DRAWN:</p> <p>CHECKED:</p> <p>ENG APPR:</p> <p>MFG APPR:</p> <p>G.A.:</p> <p>COMMENTS:</p>	<p>METAPHASE TECHNOLOGIES, INC.</p> <p>TITLE:</p> <p>FRONT LIGHT, LINEAR, .5 X 4 INCH</p> <p>SIZE: B DWG. NO.: LFL1X4 REV: A</p> <p>SCALE: 1:1 WEIGHT: SHEET 1 OF 1</p>
	<p>NEXT ASSY:</p> <p>USED ON:</p>		