

MetaBright™ High Power Diffuse Tube Light

Model#: MB-DT406



- Patent-pending LED heat management for consistent performance
- Optical grade reflector coating reflects 99.9% of light for optimum diffused output
- High intensity and uniform, non-directional illumination across entire lighting hemisphere for area scan
- Ideal for highly reflective surfaces and textured or topographic objects
- Provides cloudy day illumination, minimizing shadows and glare
- Enclosed workspace blocks interference of ambient light
- Strobe & dimming options

Specifications:

Current Consumption	4.0A @24VDC
Housing	Aluminium
Finish	Powder Coated Black
Intensity Uniformity	+/-5%
Weight	7.5lbs / 3,401g
Operating Temperature	120° F Max
Illuminance	38,000 Lux
Compliance	CE/RoHS
Lifetime Hours	75,000 Hours

Active Area

7 x 27 in
177.8mm x 685.8mm

Dimensions

21.15 in x 28.9 in x 3.875 in
537.21mm x 734.06mm x 98.42mm


Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground

18 AWG 4 WIRES CABLE X 1
When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground




ORDERING INFORMATION:

• M B - D T 4 0 6	-	<input type="checkbox"/>	-	2 4	-	<input type="checkbox"/>	
		W	White 6000k			*BLANK	10 ft. Flying Leads
		R	Red 630nm			T	M12 Quick Disconnect
		G	Green 530nm			ILD	In Line Dimmer
		B	Blue 455 nm			ILS	In Line Strobe (customer provide trigger info)
		IRN	Infrared 850nm			LL	Long Focal Lens

MetaBright™ High Power Diffuse Tube Light

Model#: MB-DT406

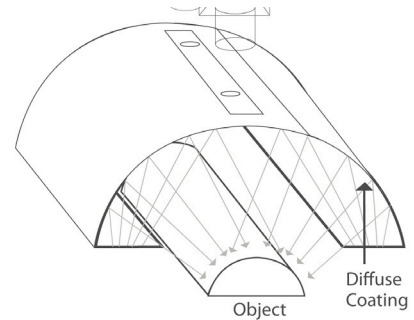

Contact Us:

Contact your Metaphase Technologies Representative for options including: Diffuser Choice, Polarizer & Light Control Film, Specific Intensity & Uniformity, & Wavelength.

Drawing/Diagram

