



Vision Light Tech



creating optical solutions



Product Name	TF25MA-1
Focal length [mm]	25
(Design value)	(25,58)
Iris range (Fnumber)	F2-F22 · Close
Angle of view	16.1°x 12.1°(1/1.8")
Working distance (from front of front lens)	∞ - 200
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	140
Sensor size (std.)	1/1.8" (2.0μm)
Sensor size (max.)	2/3" (3.45μm)
Back focal length (in air) [mm]	16,02
Flange back [mm]	17,526
Entrance pupil position (from Mount) [mm]	-25,91
Exit pupil position (from image plane) [mm]	-1995,79
Front principal point (from Mount) [mm]	-0,66
Rear principal point (from Mount) [mm]	-8,08
Distance between the principal points [mm]	7,42
TV distortion [%]	-0,21
Dimension [mm]	φ34 x 63
Chief Ray Angle [°]	-0.3
Relative illumination [%] (Aperture: F4.0, Image height: at diagonal)	74
Relative illumination [%] (Aperture: at full open, Image height: at diagonal)	63
Operation Temperature	-10°C ~ +50°C

These specification are subject to change without notice.

TF25MA-1

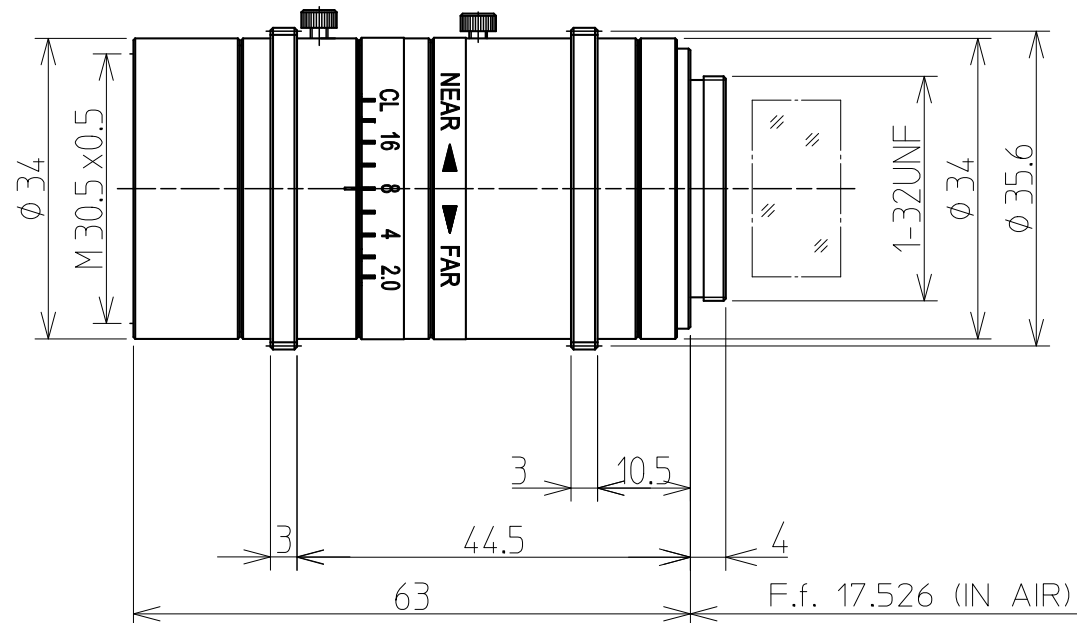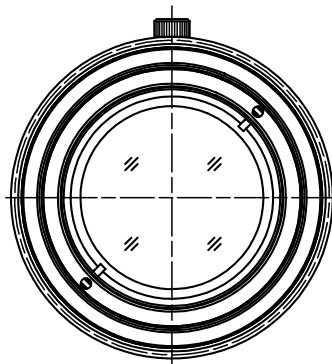

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01