



Vision Light Tech

creating optical solutions

PF series

High Power Strobe LED Light Units/Control Units

PF Series



Presenting New Product Types

Expanded Variations That Enable Broader Applications

NEW

Dome Type

4 Million lx

Peak illuminance measured using HPD-PF-100SW (LWD=5 mm)

NEW

Ring Type for
Diffused Lighting

2.5 Million lx

Peak illuminance measured using HPR-PF-75SW (LWD=10 mm)

Bar Type

7 Million lx

Peak illuminance measured using LDL-PF-152X30SW (LWD=30 mm)

Ring Type

6.5 Million lx



Peak illuminance measured using LDR-PF-75SW (LWD=30 mm)

Improved Line of Dome Types and Ring Types for Diffused Lighting



Ring type for diffused lighting
HPR-PF Series

Brightness up to **8x**^{*}
That of Conventional Products

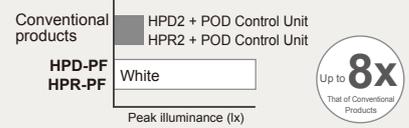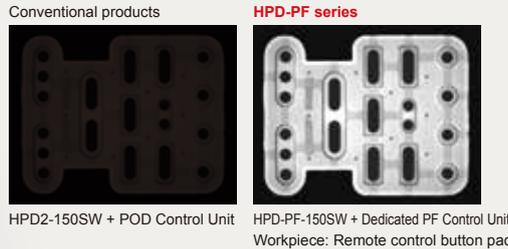

* Current as of CCS's in-house measurement conditions in May 2017.
The data included is for reference only. Actual values may vary.

The HPD-PF series achieves a brightness up to 8x that of strobe lighting in conventional products.
The new HPD-PF and HPR-PF types can handle jobs that had been difficult with insufficient output.

Dome Type HPD-PF

Imaging Examples

Imaging the 2-dimensional code

Workpiece




HPD2-75SW +
General purpose Strobe Control Unit



Image is blurred and code cannot be read.

HPD-PF-75SW +
Dedicated PF Control Unit




Bright, blur-free image can be captured.

Imaging the appearance of tablets

Workpiece



HPD-PF-75SW



Surface condition of tablet and text can be read.




Application examples


- Visual inspection of foods and pharmaceuticals
- Visual inspection of semiconductors and electronic components
- Visual inspection of cans and plastic products
- Visual inspection of metal parts, etc.

Data (Representative)

LWD Characteristics

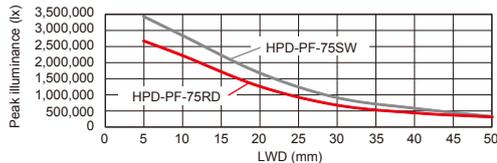

Uniformity

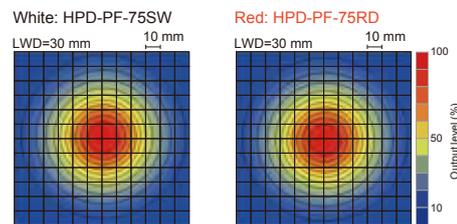


The data included is for reference only. Results for individual products may vary.



Specifications

Model name	HPD-PF-75	HPD-PF-100	HPD-PF-150	HPD-PF-200
	SW	RD	SW	RD
LED color	White (SW)	Red (RD)	White (SW)	Red (RD)
Correlated color temp. (typ.)	6,500 K	—	6,500 K	—
Peak wavelength (typ.)	—	626 nm	—	626 nm
Peak current (max.)	12 A	21.6 A	36 A	43.2 A
Input voltage (max.)	48 VDC			
Lighting conditions	Maximum strobe time: 500 μs, Maximum duty ratio: 1%			
Connector	4-pin EL connector (ELP-04NV)		9-pin EL connector (ELP-09V)	
Extension cable	FCB-PF Series (sold separately)		FCB-PF-EL9 Series (sold separately)	
Cooling method	Natural air-cooling			
Operating env. (indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)			
Storage environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)			
CE marking	Safety standard: Conforms to EN 62471-1			
Environmental regulations	RoHS compliant			
Case material	Aluminum alloy, Resin			
Weight (max.)	150 g	170 g	310 g	480 g
Light spectrum				


Dimensions (mm)

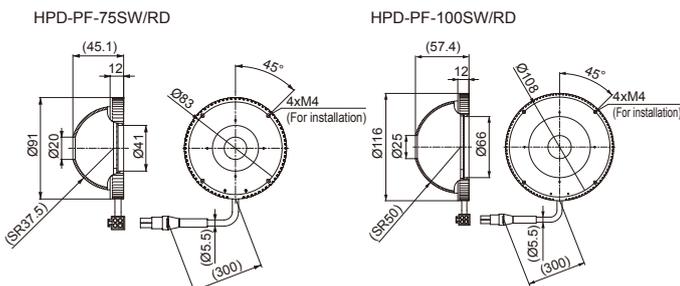

Connecting an extension cable to the HPD-PF-75/100 Light Unit

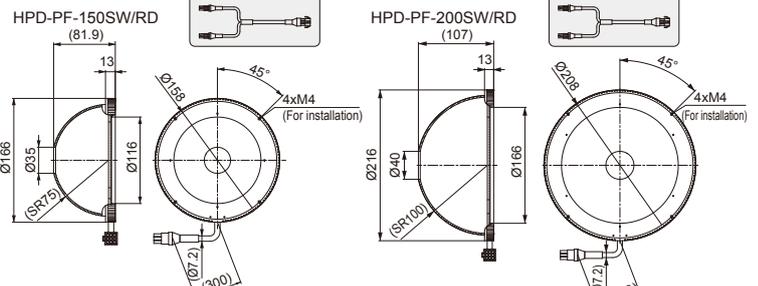

Connecting an extension cable to the HPD-PF-150/200 Light Unit



Extensive Model Variations — Total of 38 Models with 16 Newly Added Types

Dome type
HPD-PF Series 8 models



Ring type for diffused lighting
HPR-PF Series 8 models

Total of
= 38 models

- Dome type: 8 models
- Ring type for diffused lighting: 8 models
- Coaxial type: 4 models
- Ring type: 6 models
- Bar type: 12 models

Dedicated Control Unit for
High Power Strobe Light Unit



PF-A4048-2
(2-channel model)

Newly Added Types
Ring type for diffused lighting and dome type: **16 models** + **22 models**

Ring Type for Diffused Lighting

HPR-PF



- Application examples
- Visual inspection of foods and pharmaceuticals
 - Visual inspection of semiconductors and electronic components
 - Visual inspection of automobile parts
 - Visual inspection of beverage containers, etc

Imaging Examples

Imaging the characters on an electronic component



Image is blurred because exposure time was increased for brightness.



Bright, blur-free image can be captured.

Imaging the bottom surface of a beverage container




Condition of container bottom and text can be read.




Data (Representative)

LWD Characteristics

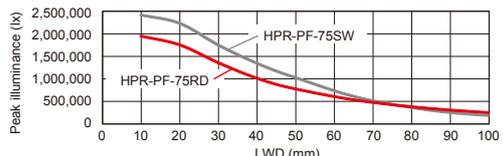

Uniformity

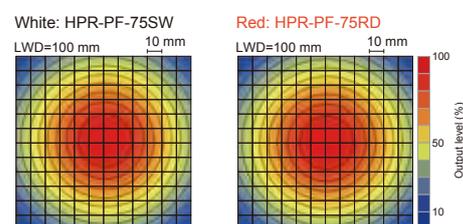


The data included is for reference only. Results for individual products may vary.


Specifications

Model name	HPR-PF-75□□	HPR-PF-100□□	HPR-PF-150□□	HPR-PF-200□□
LED color	White (SW) Red (RD)	White (SW) Red (RD)	White (SW) Red (RD)	White (SW) Red (RD)
Correlated color temp. (typ.)	6,500 K	6,500 K	6,500 K	6,500 K
Peak wavelength (typ.)	626 nm	626 nm	626 nm	626 nm
Peak current (max.)	12 A	21.6 A	36 A	43.2 A
Input voltage (max.)	48 VDC			
Lighting conditions	Maximum strobe time: 500 μs, Maximum duty ratio: 1%			
Connector	4-pin EL connector (ELP-04NV)		9-pin EL connector (ELP-09V)	
Extension cable	FCB-PF Series (sold separately)		FCB-PF-EL9 Series (sold separately)	
Cooling method	Natural air-cooling			
Operating env. (indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)			
Storage environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)			
CE marking	Safety standard: Conforms to EN 62471-1			
Environmental regulations	RoHS compliant			
Case material	Aluminum alloy, Resin			
Weight (max.)	170 g	180 g	270 g	400 g
Light spectrum				

Dimensions (mm)

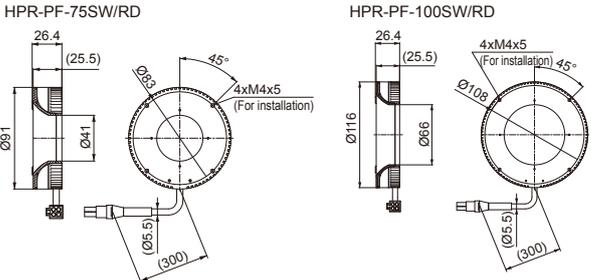

Connecting an extension cable to the HPR-PF-75/100 Light Unit

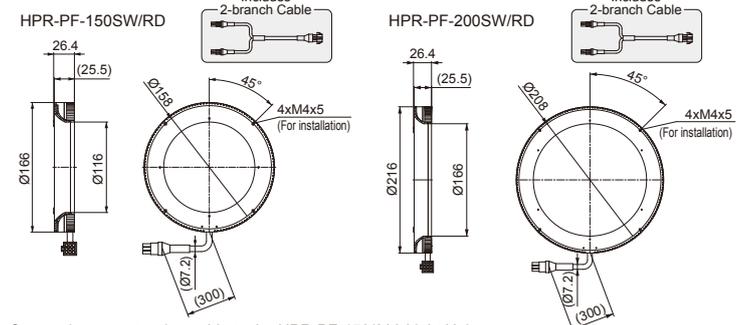

Connecting an extension cable to the HPR-PF-150/200 Light Unit



“Extreme Power” Strobe Lights

Dedicated Control Unit for High Power Strobe Light Units



PF-A4048-2 (2-channel model)

only made possible by mastering LEDs.

Peak illuminance: 3.9 million lx

Measured using HPD-PF-100SW (LWD=5 mm)
Actual value may vary.


Strobe time: 1 to 100 μ s

991 levels (0.1 μ s increments)

Maximum duty ratio: 1%


Expanded Variations & Broader Applications

Dome types in 4 sizes and ring types for diffused lighting in 4 sizes have been newly added to our line of ring types in 3 sizes, bar types in 6 sizes, and coaxial types in 2 sizes.

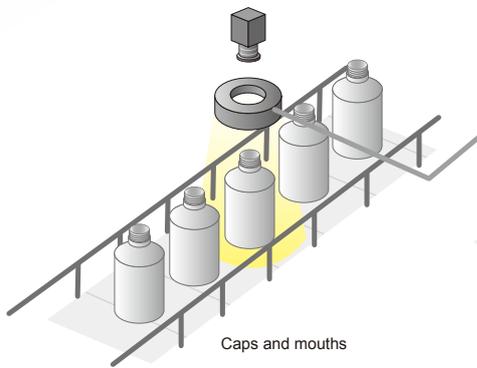


Caps and mouths

Inspection of beverage containers

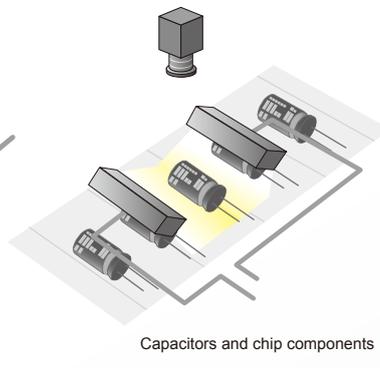

Capacitors and chip components

Inspection of electronic components

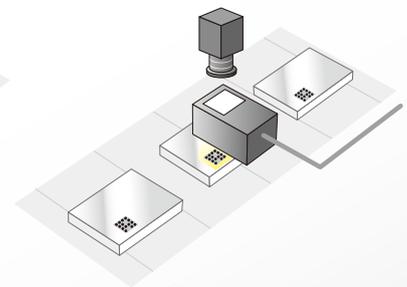

QR codes and barcodes

Reading barcodes


Delivers high power strobe lighting.

Contributes to increasing inspection speeds and improving productivity.

High Brightness Comparable to Xenon Flash Lamps


Adjusting the strobe time of the PF series Light Unit enabled the same inspection speed made possible by xenon lamps.

15 W xenon flash lamp



Strobe time: 1.75 μ s (measured value)

High Power Strobe LED Light




Strobe time: 15 μ s

Solve your xenon flash lamp problems with LEDs.

	Brightness stability	Flashing failure	Controllability	Operational lifetime	Fiber cabling	Environmental impact	Operating noise	Number of channels
High Power Strobe LED Lights	Stable No impact on inspection accuracy.	Flashing does not fail. No impact on inspection accuracy.	Good Light intensity, strobe time, and lighting delay time can be set with various types of external control.	Long Long service life. 50,000 hours. (Expected service life)	Flexible Installation flexibility.	Small Contributes to reducing CO ₂ and saving energy.	Quiet No operating noise.	More than one Available with multiple channels. Multiple Light Units can be used with a single Control Unit.
Xenon Flash Lamps	Fluctuant Impacts inspection accuracy.	Flashing sometimes fails. Impacts inspection accuracy.	Poor Light control is possible, but strobe time is fixed.	Short The service life of xenon lamps is typically 3,000 hours.	Inflexible Inconvenient to route fiber.	Large Mercury contained in the used lamps makes them difficult to dispose.	Abrasive Characteristic operating noise.	One If multiple lights are required, additional fiber and light sources are required.



Using the Flash As a Camera Shutter

Example


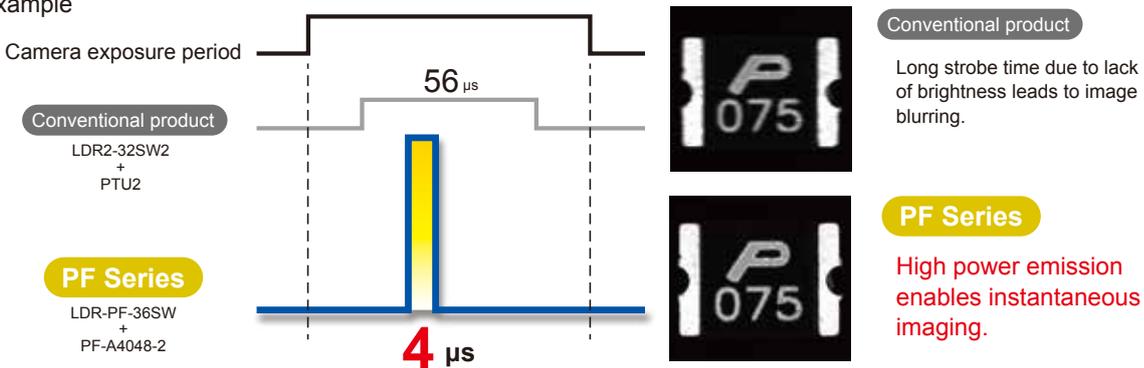


Eliminating Image Blur

● Horizontal blur

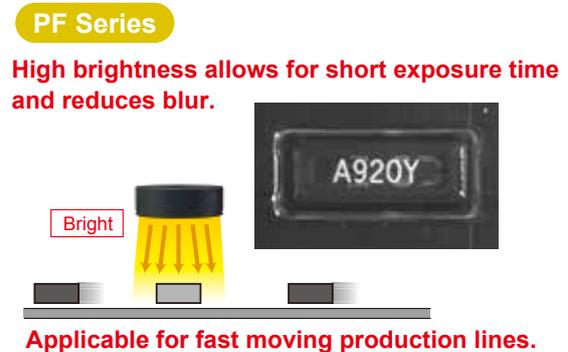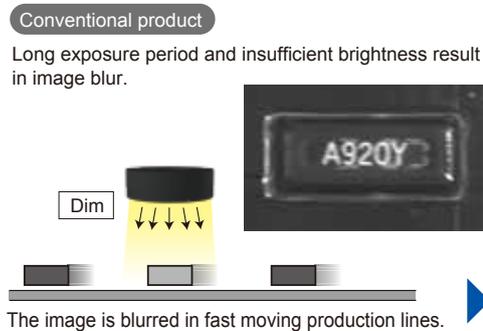


● Vertical blur

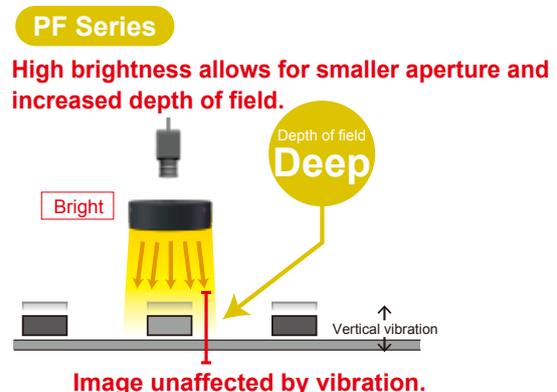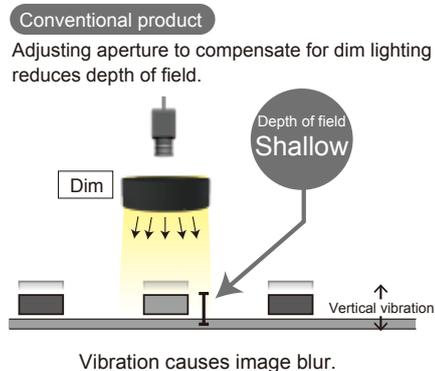

Freely Adjustable Flash Timing

You can use the lighting delay time setting of the Control Unit to adjust the timing of the flash to be within the exposure period of the camera.

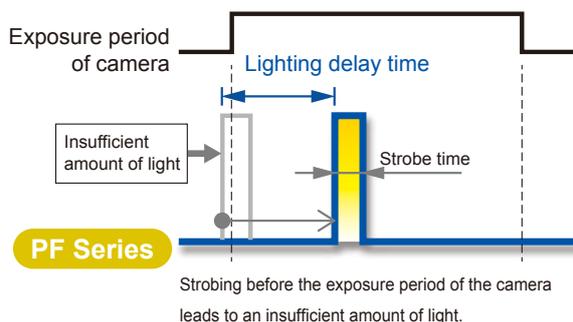

Delaying the timing of the flash enables strobing **within the exposure period** of the camera.

Dedicated Control Unit for High Power Strobe Light Units



PF-A4048-2
(2-channel model)

Applications

Introducing Various Examples Obtained by Using Extreme Power Strobe Lights

Application examples

Visual inspection and marking inspection of semiconductors and electronic components; visual inspection of cans, plastics, and resin products; visual inspection of metal parts; visual inspection of printed materials; visual inspection of beverage containers; visual inspection of foods and pharmaceuticals; inspection of labels; and visual inspection of automobile parts; etc.

Resin Industry

- Imaging Foreign Material Mixed among Resin Pellets



Workpiece



Resin pellets

HPD-PF-150SW (White)



You can check for resins of different colors by combining the light with a color camera.

Electronic Components Industry

- Imaging the External Appearance of Capacitors



Workpiece



Capacitor



Dome Light: HPD-PF-75SW (White)
Coaxial Light: LFV-PF-50SW (White)



Evenly illuminate the entire surface of a capacitor by combining dome type and coaxial type lights.

Automobile Parts Industry

- Imaging the External Appearance of O-rings



Workpiece



O-ring

HPR-PF-75SW (White)



You can check the condition of an O-ring surface by brightly and evenly illuminating it.

Metal Parts Industry

- Imaging the Appearance of the Inside of Lids



Workpiece



Spray can lid

HPR-PF-75RD (Red)



You can check the condition of the inside of the lid by combining the light with a hypercentric lens.

What is a hypercentric lens?

A hypercentric lens can simultaneously focus on the top surface of an object and the sides that surround it to create a converging view of an object.

A hypercentric lens can also be used as a long working distance borescope by adding a spacer in between the lens and camera. This allows you to view the inside walls and bottom of the object at the same time.

Metal Parts Industry

● Imaging Drill Tips



Workpiece



Drill

LDR-PF-54RD (Red)



Printing Industry

● Imaging the External Appearance of Playing Cards



Workpiece



Playing card

LDL-PF-102X18SW (White)



Electronic Components Industry

● Imaging the External Appearance of Chip Components




Workpiece



Chip component

LDR-PF-36SW (White)



● Imaging the External Appearance of Electronic Components




Workpiece



Electronic components

LDL-PF-52X18SW (White)



Food Industry

● Imaging the External Appearance of Paper Label with Barcode



Workpiece



Beverage bottle

LDL-PF-102X18SW (White)




The polarizing plate is used.


Ring Type

● Data (Representative)

LWD Characteristics

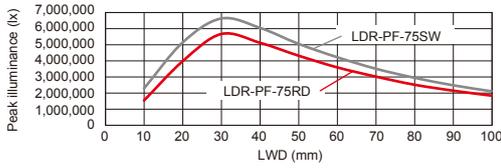

Uniformity

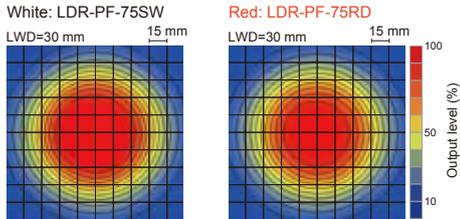

The data included is for reference only. Results for individual products may vary.



● Specifications


□: SW or RD

Model name	LDR-PF-36 □		LDR-PF-54 □		LDR-PF-75 □	
LED color	White (SW)	Red (RD)	White (SW)	Red (RD)	White (SW)	Red (RD)
Correlated color temp. (typ.)	7,500 K	—	7,500 K	—	7,500 K	—
Peak wavelength (typ.)	—	627 nm	—	627 nm	—	627 nm
Peak current (max.)	5.4 A		10.8 A		21.6 A	18 A
Input voltage (max.)	48 VDC					
Lighting conditions	Maximum strobe time: 500 μs, Maximum duty ratio: 1%					
Connector	EL connector (ELP-04NV)					
Extension cable	FCB-PF Series (sold separately)					
Cooling method	Natural air-cooling					
Operating env. (Indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)					
Storage environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)					
CE marking	Safety standard: Conforms to EN 62471-1					
Environmental regulations	RoHS compliant					
Case material	Aluminum alloy, Resin					
Weight (max.)	70 g		110 g		150 g	
Light spectrum						


Bar Type

● Data (Representative)

LWD Characteristics

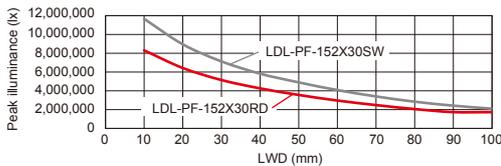

Uniformity

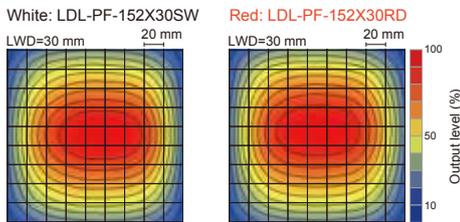

The data included is for reference only. Results for individual products may vary.



● Specifications


■: 18 or 30 □: SW or RD

Model name	LDL-PF-52X ■■■ □				LDL-PF-102X ■■■ □				LDL-PF-152X ■■■ □			
Emitting width	18 mm	30 mm	18 mm	30 mm	18 mm	30 mm	18 mm	30 mm	18 mm	30 mm	18 mm	30 mm
LED color	White (SW)	Red (RD)	White (SW)	Red (RD)	White (SW)	Red (RD)	White (SW)	Red (RD)	White (SW)	Red (RD)	White (SW)	Red (RD)
Correlated color temp. (typ.)	7,500 K		—		7,500 K		—		7,500 K		—	
Peak wavelength (typ.)	—		627 nm		—		627 nm		—		627 nm	
Peak current (max.)	5.4 A	9 A	5.4 A	9 A	10.8 A	18 A	10.8 A	18 A	16.2 A	27 A	16.2 A	27 A
Input voltage (max.)	48 VDC											
Lighting conditions	Maximum strobe time: 500 μs, Maximum duty ratio: 1%											
Connector	EL connector (ELP-04NV)											
Extension cable	FCB-PF Series (sold separately)											
Cooling method	Natural air-cooling											
Operating env. (Indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)											
Storage environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)											
CE marking	Safety standard: Conforms to EN 62471-1											
Environmental regulations	RoHS compliant											
Case material	Aluminum alloy, Resin											
Weight (max.)	140 g	180 g	140 g	180 g	210 g	270 g	210 g	270 g	290 g	380 g	290 g	380 g
Light spectrum												


Coaxial Type

● Data (Representative)


LWD Characteristics

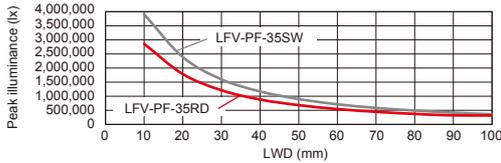

Uniformity

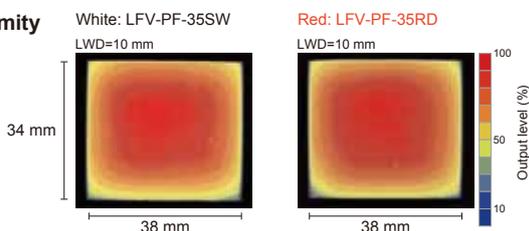

The data included is for reference only. Results for individual products may vary.



● Specifications


□: SW or RD

Model name	LFV-PF-35 □		LFV-PF-50 □	
LED color	White (SW)	Red (RD)	White (SW)	Red (RD)
Correlated color temp. (typ.)	7,800 K	—	7,800 K	—
Peak wavelength (typ.)	—	627 nm	—	627 nm
Peak current (max.)	14.4 A	10.8 A	21.6 A	18 A
Input voltage (max.)	48 VDC			
Lighting conditions	Maximum strobe time: 500 μs, Maximum duty ratio: 1%			
Connector	EL connector (ELP-04NV)			
Extension cable	FCB-PF Series (sold separately)			
Cooling method	Natural air-cooling			
Operating env. (Indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)			
Storage environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)			
CE marking	Safety standard: Conforms to EN 62471-1			
Environmental regulations	RoHS compliant			
Case material	Aluminum alloy, Resin			
Weight (max.)	230 g		400 g	
Light spectrum				


Dimensions (mm)

● Ring Type


LDR-PF-36SW/RD

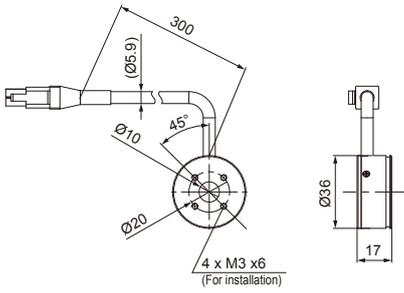

LDR-PF-54SW/RD



LDR-PF-75SW/RD

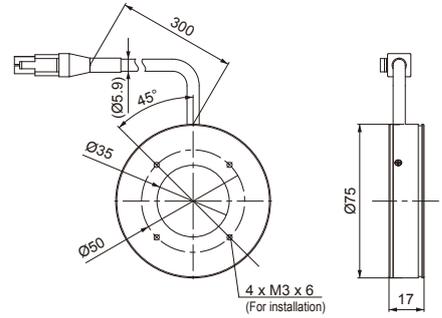



● Bar Type

Emitting width: 18 mm

Model name	B	C
LDL-PF-52X18SW/RD	64	52
LDL-PF-102X18SW/RD	114	102
LDL-PF-152X18SW/RD	164	152

Emitting width: 30 mm


Model name	B	C
LDL-PF-52X30SW/RD	64	52
LDL-PF-102X30SW/RD	114	102
LDL-PF-152X30SW/RD	164	152

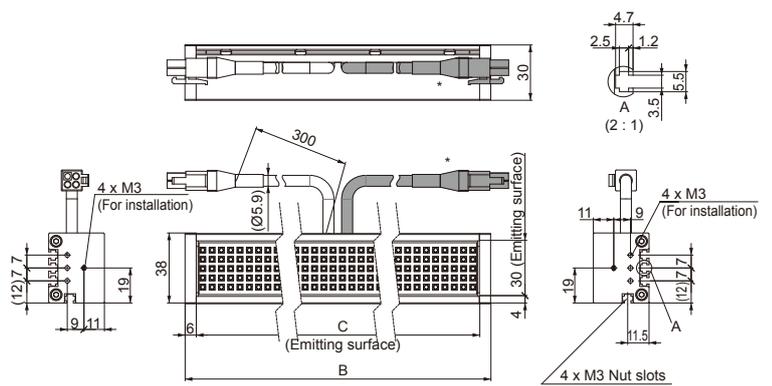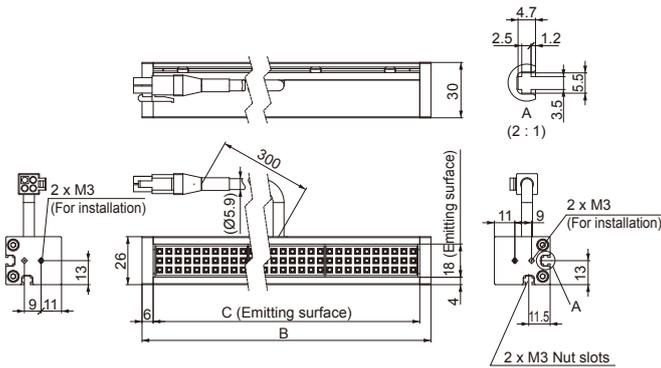


* The LDL-PF-152X30SW/RD Light Unit has two connectors.

● Coaxial Type

LFV-PF-35SW/RD

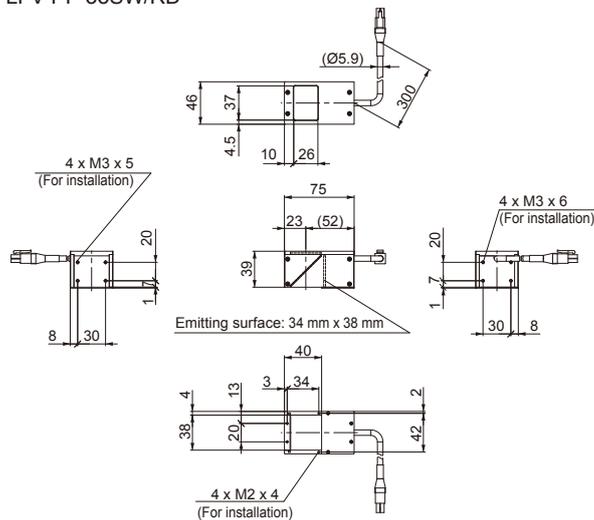

LFV-PF-50SW/RD

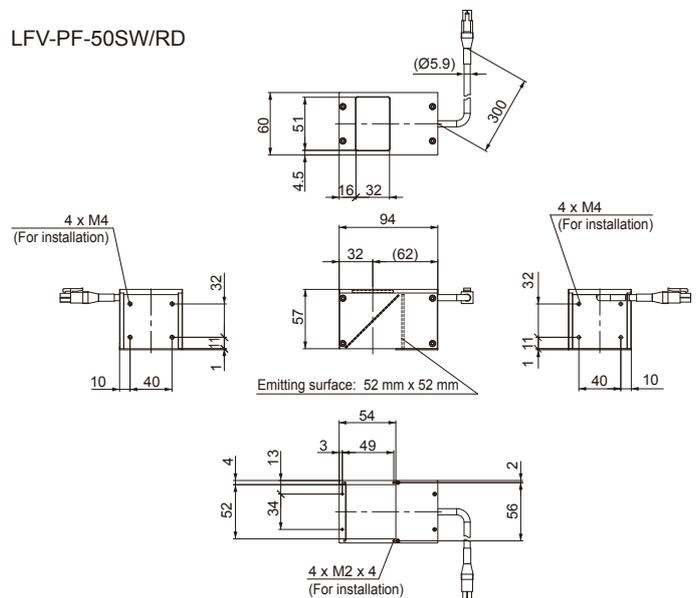

Available Soon

Dedicated Control Unit for High Power Strobe LED Lights (4-channel model)


Maximize the performance of the High Power Strobe LED Light Units.

Presenting a new 4-channel model.
For implementing varied types of
Light Unit control.


Available Soon
4-channel Control Unit
PF-A16048-4



● **Control Light Units installed in four directions**

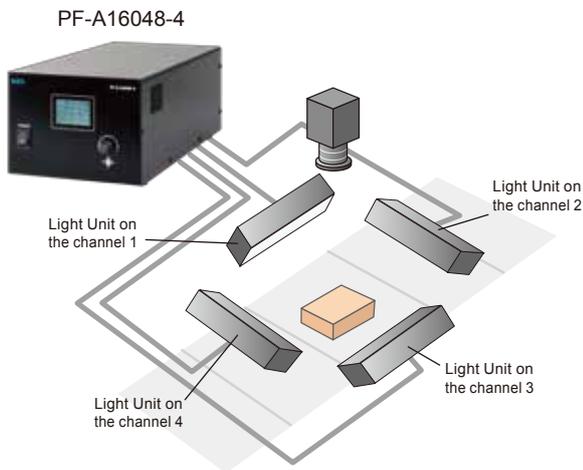


● **Control multiple Light Units for inspections**

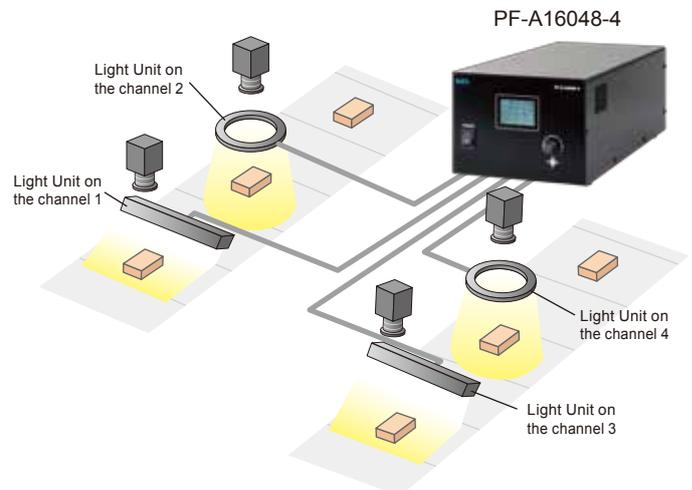

Individual ON/OFF control and group ON/OFF control are possible.

Light intensity: 512 levels

Brightness can be adjusted by adjusting output voltage.
(Variable-voltage control)

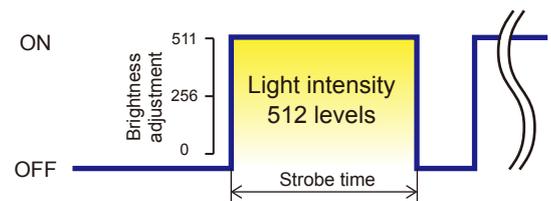

Compatible with Ethernet and parallel interfaces

Strobe time (Maximum duty ratio: 1%)


Ethernet	1 to 100 μ s (in steps of 0.1 μ s)	Parallel	Low strobe time range: 1 to 100 (in steps of 0.1 μ s)
	100.5 to 500 μ s (in steps of 0.5 μ s)		High strobe time range: 5 to 500 μ s (in steps of 0.5 μ s)

Lighting delay: 0 to 100 μ s (in steps of 0.1 μ s)

Light Intensity Ranges

You can specify either one of the light intensity ranges shown below for each channel. The output voltage of the output connector varies, depending on the light intensity range.

- High light intensity range (default): 33 to 48 VDC
- Low light intensity range: 12 to 48 VDC

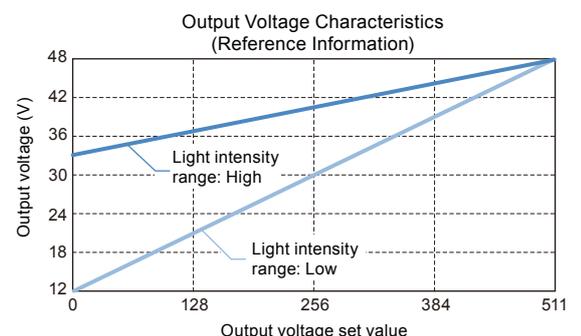

Specifications


Model name	PF-A4048-2, PF-A16048-4	
Lighting method	Strobe lighting	
Drive method	Constant-voltage system	
Intensity control method	Variable-voltage control, Strobe time control	
Number of channels	PF-A4048-2: 2 channels, PF-A16048-4: 4 channels	
Number of output connectors	PF-A4048-2	L1: 2, L2: 1
	PF-A16048-4	L1: 2, L2: 2, L3: 2, L4: 2
Applicable Light Unit (ratings)	High Power Strobe Light Units from CCS	
Output voltage settings	Manual	Operation on the front panel
	External	Command input via TCP/IP or UDP/IP comm.
		Signal input through parallel port
		512 levels
Strobe time settings	Manual	Operation on the front panel
	External	Command input via TCP/IP or UDP/IP comm.
		Signal input through parallel port
		PF-A4048-2: 1 to 100 μ s (in steps of 0.1 μ s) PF-A16048-4: 1 to 500 μ s*
Lighting delay settings	Manual	Operation on the front panel
	External	Command input via TCP/IP or UDP/IP comm.
		Signal input through parallel port
		0 to 100 μ s (in steps of 0.1 μ s)
Input power	100 to 240 VAC (+10%, -15%), 50/60 Hz	
Power consumption (typ.)	PF-A4048-2: 65 VA, PF-A16048-4: 140 VA	

Inrush current (typ.)	PF-A4048-2: 15 A (at 100 VAC), 36 A (at 240 VAC) from a cold start PF-A16048-4: 17 A (at 100 VAC), 40.8 A (at 240 VAC) from a cold start
Ground leakage current	3.5 mA max. (264 VAC, 60 Hz, with no load)
Output voltage (ratings)	High intensity range: 33 to 48 VDC Low intensity range: 12 to 48 VDC
Output current (peak)	PF-A4048-2: 43.2 A total for 2 channels (21.6 A/connector), PF-A16048-4: 172.8 A total for 4 channels (21.6 A/connector)
Insulation withstand voltage (input-output, input-FG)	1500 VAC for one minute, Cutoff current: 10 mA, 500 VDC, 20 M Ω min.
Overvoltage category	Category II
Operating environment	Temperature: 0 to 40°C, Humidity: 20% to 85% (with no condensation) Altitude: 2,000 m max., Protective ground class: Class I, Pollution degree: 2, Indoor use only
Storage environment	Temperature: -20 to 60°C, Humidity: 20% to 85% (with no condensation)
Cooling method	Forced air cooling
CE marking	Safety standard: Conforms to EN 61010-1, EMC standard: Conforms to EN61000-6-2 and EN61000-6-4
Environmental regulations	RoHS compliant
Material, coating, and surface processing	Steel sheet, Cover thickness: 1.6 mm, Chassis thickness: 1.0 mm, Black (half matte)
Weight	PF-A4048-2: 1,900 g max., PF-A16048-4: 3,300 g max.
Accessories	Instruction guide, 2-m-long 3-prong AC power cord with ground terminal

* For Ethernet communications: 1 to 100 μ s (in steps of 0.1 μ s), 100.5 to 500 μ s (in steps of 0.5 μ s)
For parallel communications: Low strobe time range (1 to 100 μ s, in steps of 0.1 μ s), High strobe time range (5 to 500 μ s, in steps of 0.5 μ s)


Dimensions (mm)

PF-A4048-2

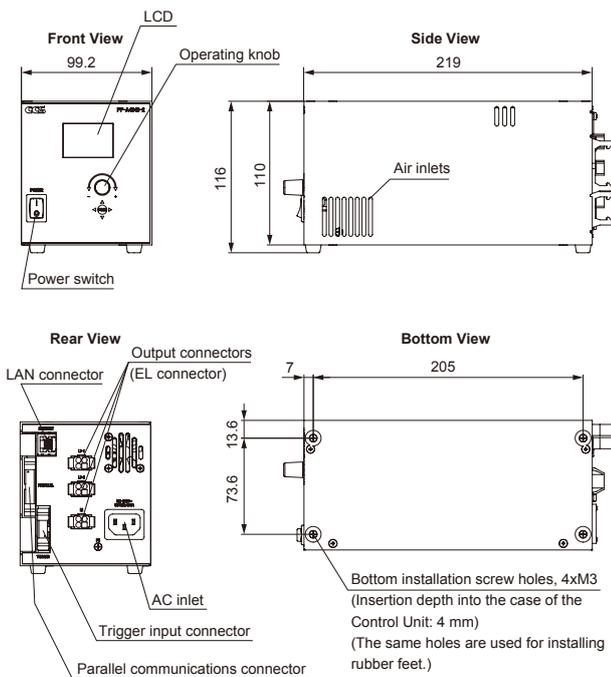

PF-A16048-4


Available Soon

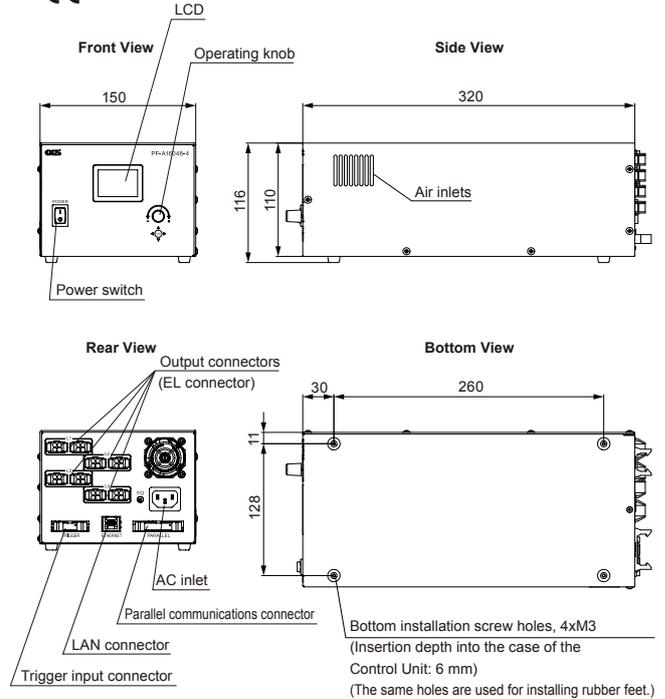

Optional Accessories (mm)


Trigger Input Cable

Model name: EXCB2-M10-3




Parallel Communications Cable

Model name: EXCB2-M20-3



Parallel Communications and Trigger Input Branch Cable

Model name: EXCB2-M10M20-3

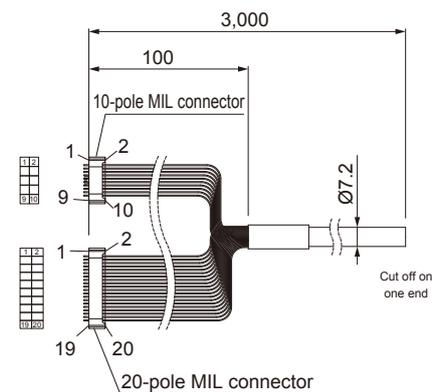

Optional Accessories

Diffusion Plates Reduces glare, especially problematic in the imaging of glossy workpieces.

Ring type units



Model name	Applicable Light Unit
DF-LDR-PF-36	LDR-PF-36
DF-LDR-PF-54	LDR-PF-54
DF-LDR-PF-75	LDR-PF-75

An adapter is needed for attachment to the Light Unit.

Bar type units



Model name	Applicable Light Unit
DF-LDL-PF-52X18	LDL-PF-52X18
DF-LDL-PF-102X18	LDL-PF-102X18
DF-LDL-PF-152X18	LDL-PF-152X18
DF-LDL-PF-52X30	LDL-PF-52X30
DF-LDL-PF-102X30	LDL-PF-102X30
DF-LDL-PF-152X30	LDL-PF-152X30

Light-color



Transmission: High

Dark-color



Transmission: Low

These are the same Diffusion Plates as those installed at the factory.

Model name	Applicable Light Unit	Model name	Applicable Light Unit
DF-LFV3-35	LFV-PF-35	DF-LFV3-35-UF	LFV-PF-35
DF-LFV3-50	LFV-PF-50	DF-LFV3-50-UF	LFV-PF-50

Polarizing Plates Reduces glare when used in combination with a Polarizing Filter on the camera.

Ring type units



Model name	Applicable Light Unit
PL-LDR-PF-36	LDR-PF-36
PL-LDR-PF-54	LDR-PF-54
PL-LDR-PF-75	LDR-PF-75

An adapter is needed for attachment to the Light Unit.

Bar type units



Model name	Applicable Light Unit
PL-LDL-PF-52X18-△△	LDL-PF-52X18
PL-LDL-PF-102X18-△△	LDL-PF-102X18
PL-LDL-PF-152X18-△△	LDL-PF-152X18
PL-LDL-PF-52X30-△△	LDL-PF-52X30
PL-LDL-PF-102X30-△△	LDL-PF-102X30
PL-LDL-PF-152X30-△△	LDL-PF-152X30

△△ : Polarizing direction
 HO: Light is polarized parallel to the longer edge of the plate.
 VE: Light is polarized parallel to the shorter edge of the plate.

Coaxial type units



Model name	Applicable Light Unit
PL-LFV3-35	LFV-PF-35
PL-LFV3-50	LFV-PF-50

Polarizing Filters

For use with camera lenses



Model name	Notes
PL-25	M25.5 P0.5
PL-25-NL	M25.5 P0.5
PL-27	M27.0 P0.5
PL-27-NL	M27.0 P0.5
PL-30	M30.5 P0.5
PL-30-NL	M30.5 P0.5
PL-40	M40.5 P0.5
PL-40-NL	M40.5 P0.5
PL-46	M46.0 P0.75

Note: "NL" models have a lock.

Light Control Films

Improves parallelism of light to reduce light diffraction.

Coaxial type units

Model name	Applicable Light Unit
LC-LFV3-35	LFV-PF-35
LC-LFV3-50	LFV-PF-50

Adapters

For attaching a Diffusion Plate or Polarizing Plate to the Light Unit.

Ring type units

Model name	Applicable Light Unit
AD-LDR-PF-36	LDR-PF-36
AD-LDR-PF-54	LDR-PF-54
AD-LDR-PF-75	LDR-PF-75




Brackets

Secures Light Units. Bar type units

Model name	Applicable Light Unit
BK-LDL-PF	LDL-PF-52X18
	LDL-PF-102X18
	LDL-PF-152X18
	LDL-PF-52X30
	LDL-PF-102X30
	LDL-PF-152X30



Brackets Joint Brackets are used to join a dome type unit with a ring or coaxial type unit.



Joint Brackets

Light Joint Brackets

Model name	Applicable units 1	Applicable units 2
BK-75-JO	HPD-PF-75	HPR-PF-75
BK-100-JO	HPD-PF-100	HPR-PF-100
BK-150-JO	HPD-PF-150	HPR-PF-150
BK-200-JO	HPD-PF-200	HPR-PF-200

Coaxial Light Joint Brackets

Model name	Applicable units 1	Applicable units 2
BK-HPD2-75-LFV	HPD-PF-75	LFV-PF-35
BK-HPD2-100-LFV	HPD-PF-100	LFV-PF-50
BK-HPD2-150-LFV	HPD-PF-150	LFV-PF-50

Expansion Mounting Brackets


Model name	Applicable Light Units
BK-75-CI	HPD-PF-75 HPR-PF-75
BK-100-CI	HPD-PF-100 HPR-PF-100
BK-150-CI	HPD-PF-150 HPR-PF-150
BK-200-CI	HPD-PF-200 HPR-PF-200

Cables

Connects a Light Unit and Control Unit.

Extension Cables


Applicable Units	Model name	Dimension A	Dimension B	Weight	Permitted bending radius
• Ring type units	FCB-1-PF	1,000		100 g	
• Bar type units	FCB-2-PF	2,000	Ø5.9	150 g	35.4 mm
• Coaxial type units	FCB-3-PF	3,000		200 g	
	FCB-5-PF	5,000	Ø7	450 g	42.0 mm



These cables are dedicated for HPD-PF-150, HPD-PF-200, HPR-PF-150, and HPR-PF-200.

Extension Cables

Applicable Units	Model name	Dimension A	Dimension B	Weight	Permitted bending radius
• Dome type units (150 and 200 sizes)	FCB-1-PF-EL9	1,000		100 g	
• Ring type units for diffused lighting (150 and 200 sizes)	FCB-2-PF-EL9	2,000	Ø7.4	190 g	44.4 mm
	FCB-3-PF-EL9	3,000		270 g	
	FCB-5-PF-EL9	5,000	Ø9.1	680 g	54.6 mm



Polarizing Plates and Diffusion Plates are wear and tear items. Please inspect them periodically and replace them if they are discolored or deformed. For optional accessories, we recommend keeping several to use as replacement parts.

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01