



BN880 NARROW NEAR-IR BANDPASS

WWW.MIDOPT.COM
INFO@MIDOPT.COM

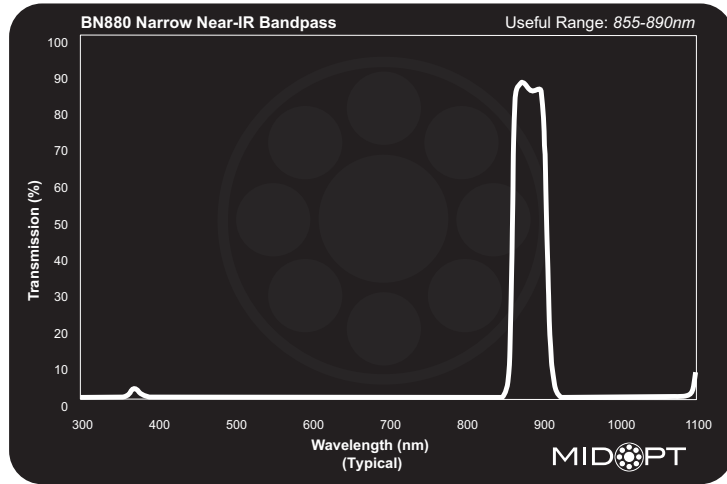

Designed for IR illumination applications, BN880 filters are suited for situations when other lighting wavelengths are also present. It is most commonly used in machine vision systems with 880nm LED lighting.

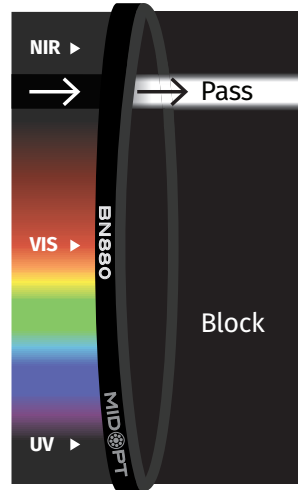

Useful Range: 855-890nm

FWHM: 45nm

Peak Transmission: ≥85%

Surface Quality: 40/20

Compatible LED: 880nm

StableEDGE™

BN880 DATA POINTS (TYPICAL)

Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)
1100	0.62	910	1.82	720	0.01	530	0.01
1090	0.65	900	16.88	710	0.03	520	0.01
1080	0.63	890	74.67	700	0.05	510	0.01
1070	0.63	880	87.53	690	0.01	500	0.01
1060	0.62	870	87.86	680	0.01	490	0.01
1050	0.50	860	89.73	670	0.00	480	0.01
1040	0.32	850	68.63	660	0.01	470	0.01
1030	0.20	840	4.58	650	0.02	460	0.06
1020	0.20	830	0.10	640	0.03	450	0.05
1010	0.29	820	0.01	630	0.00	440	0.04
1000	0.44	810	0.00	620	0.01	430	0.07
990	0.59	800	0.00	610	0.00	420	0.12
980	0.70	790	0.01	600	0.01	410	0.01
970	0.78	780	0.02	590	0.00	400	0.03
960	0.65	770	0.01	580	0.01	390	0.07
950	0.33	760	0.04	570	0.05	380	1.15
940	-0.05	750	0.02	560	0.01	370	2.37
930	0.86	740	0.04	550	0.01	360	0.26
920	1.11	730	0.08	540	0.01	350	0.00

*Due to continuous product improvement, specifications are subject to change without notice. For the most up-to-date information visit www.midopt.com

FILTER MOUNT & SIZE OPTIONS

Threaded Mount



For lenses with filter threads; Mount Sizes M13.25 - M105

Part #	Thread Dia x Pitch	Part #	Thread Dia x Pitch
BN880-13.25	M13.25 x P0.5	BN880-43	M43 x P0.75
BN880-22.5	M22.5 x P0.5	BN880-46	M46 x P0.75
BN880-25.4	M25.4 x P32TPI	BN880-48	M48 x P0.75
BN880-25.5	M25.5 x P0.5	BN880-49	M49 x P0.75
BN880-27	M27 x P0.5	BN880-52	M52 x P0.75
BN880-30.5	M30.5 x P0.5	BN880-55	M55 x P0.75
BN880-34	M34 x P0.5	BN880-58	M58 x P0.75
BN880-35.5	M35.5 x P0.5	BN880-62	M62 x P0.75
BN880-37	M37 x P0.75	BN880-67	M67 x P0.75
BN880-37.5	M37.5 x P0.5	BN880-72	M72 x P0.75
BN880-39	M39 x P0.5	BN880-77	M77 x P0.75
BN880-40.5	M40.5 x P0.5	BN880-82	M82 x P0.75

25.4™ C-Mount



Threads between lens and sensor

Part #: BN880-25.4

Slip Mount



- Designed for lenses without filter threads, varifocal and wide-angle lenses
- Includes locking set screws to secure adapter to lens

Create Part

Use "S" and add the outside diameter of lens in mm (ex: 43mm)

Example: BN880-S43

Unmounted

Custom shapes & sizes available

Create Part

CIRCLE: Use "D" and add diameter in mm (ex: 19mm)

Example: BN880-D19

RECTANGLE: Use "R" and add length in mm (ex: 30mm) x width in mm (ex: 15mm)

Example: BN880-R30x15

SQUARE: Use "R" and add side measurement in mm (ex: 15mm)

Example: BN880-R15