
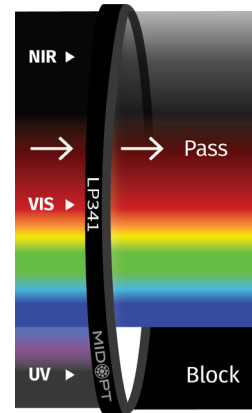


LP341 OLEOPHOBIC A/R COATING PROTECTIVE WINDOW

MIDOPT.COM
INFO@MIDOPT.COM

MIDOPT
MIDWEST OPTICAL SYSTEMS, INC.

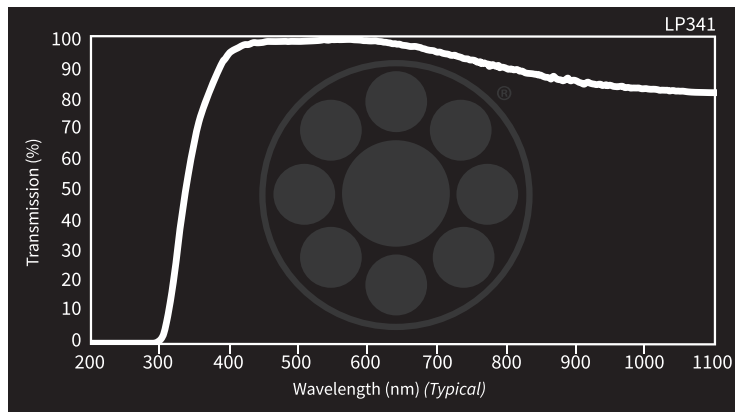

StableEDGE® Technology | A/R Oleophobic AR | 40/20 40/20 Scratch/Dig

Useful Range: 365-1100nm | Cut-on Wavelength 50% T : 335nm | Tolerance: +/-10nm | Peak Transmission: ≥98% | Surface Quality: 40/20

Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)
1100	81.96	940	84.65	780	90.93	620	98.64	460	98.65	300	1.11
1090	82.10	930	84.60	770	91.49	610	99.02	450	98.54	290	0.04
1080	82.17	920	85.11	760	92.30	600	98.87	440	98.43	280	0.01
1070	82.28	910	84.56	750	92.74	590	99.17	430	97.98	270	0.01
1060	82.33	900	85.56	740	93.07	580	99.29	420	97.60	260	0.01
1050	82.57	890	85.51	730	93.84	570	99.34	410	96.83	250	0
1040	82.66	880	85.28	720	94.08	560	99.36	400	94.97	240	0.01
1030	82.91	870	86.93	710	94.55	550	99.36	390	91.85	230	0.02
1020	82.70	860	87.15	700	95.16	540	99.20	380	87.30	220	0.03
1010	82.93	850	87.50	690	95.78	530	99.08	370	82.74	210	0
1000	83.41	840	88.19	680	96.36	520	99.22	360	76.02	200	0.05
990	83.60	830	88.22	670	97.08	510	98.93	350	67.22		
980	83.64	820	89.40	660	97.08	500	98.80	340	55.91		
970	83.62	810	89.12	650	97.45	490	98.88	330	40.14		
960	84.13	800	89.93	640	97.89	480	98.72	320	22.18		
950	84.28	790	90.85	630	98.40	470	98.80	310	7.72		

Filter Mount & Size Options

Threaded Mount



For lenses with filter threads; Mount sizes M13.25 - M105

Part #	Thread Dia x Pitch	Part #	Thread Dia x Pitch
LP341-13.25	M13.25 x P0.5	LP341-46	M46 x P0.75
LP341-22.5	M22.5 x P0.5	LP341-48	M48 x P0.75
LP341-25.4 [®] (C-Mount)	M25.4 x P32TPI	LP341-49	M49 x P0.75
LP341-25.5	M25.5 x P0.5	LP341-52	M52 x P0.75
LP341-27	M27 x P0.5	LP341-55	M55 x P0.75
LP341-30.5	M30.5 x P0.5	LP341-58	M58 x P0.75
LP341-34	M34 x P0.5	LP341-62	M62 x P0.75
LP341-35.5	M35.5 x P0.5	LP341-67	M67 x P0.75
LP341-37	M37 x P0.75	LP341-72	M72 x P0.75
LP341-37.5	M37.5 x P0.5	LP341-77	M77 x P0.75
LP341-39	M39 x P0.5	LP341-82	M82 x P0.75
LP341-40.5	M40.5 x P0.5	LP341-86	M86 x P1.0
LP341-43	M43 x P0.75	LP341-95	M95 x P1.0
		LP341-105	M105 x P1.0

25.4™ C-Mount



Threads between lens and sensor

Part #: LP341-25.4

Slip Mount



- Designed for lenses without filter threads, varifocal and wide-angle lenses
- Includes locking set screws to secure adapter to lens

Create Part # -

Use "S" and add the outside diameter of lens in mm (ex: 43mm)

Example: LP341-S43

Unmounted



Create Part# -

CIRCLE: Use "D" and add diameter in mm (ex: 19mm). *Example: LP341-D19*

RECTANGLE: Use "R" and add length in mm (ex: 30mm) x width in mm (ex: 15mm). *Example: LP341-R30x15*

SQUARE: Use "R" and add side measurement in mm (ex: 15mm). *Example: LP341-R15*