
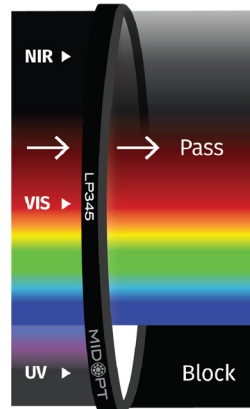


LP345 PRECISION MULTI-LAYER A/R COATED GLASS PROTECTIVE WINDOW

MIDOPT.COM
INFO@MIDOPT.COM

MIDOPT[®]
MIDWEST OPTICAL SYSTEMS, INC.

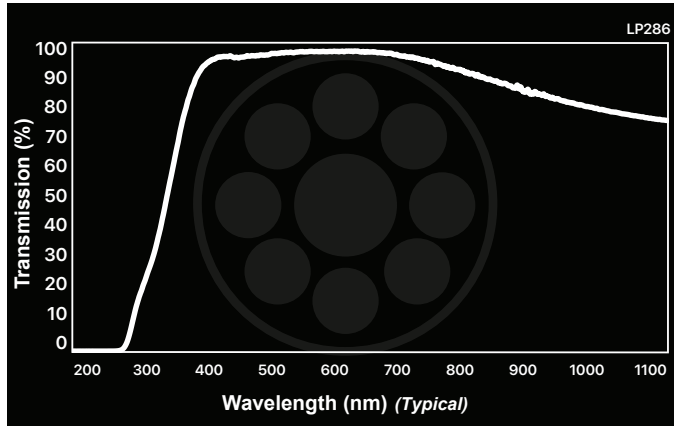

Filter Mount & Size Options

Threaded Mount



For lenses with filter threads; Mount sizes M13.25 - M105

Part #	Thread Dia x Pitch	Part #	Thread Dia x Pitch
LP345-13.25	M13.25 x P0.5	LP345-46	M46 x P0.75
LP345-22.5	M22.5 x P0.5	LP345-48	M48 x P0.75
LP345-25.4 [®] (C-Mount)	M25.4 x P32TPI	LP345-49	M49 x P0.75
LP345-25.5	M25.5 x P0.5	LP345-52	M52 x P0.75
LP345-27	M27 x P0.5	LP345-55	M55 x P0.75
LP345-30.5	M30.5 x P0.5	LP345-58	M58 x P0.75
LP345-34	M34 x P0.5	LP345-62	M62 x P0.75
LP345-35.5	M35.5 x P0.5	LP345-67	M67 x P0.75
LP345-37	M37 x P0.75	LP345-72	M72 x P0.75
LP345-37.5	M37.5 x P0.5	LP345-77	M77 x P0.75
LP345-39	M39 x P0.5	LP345-82	M82 x P0.75
LP345-40.5	M40.5 x P0.5	LP345-86	M86 x P1.0
LP345-43	M43 x P0.75	LP345-95	M95 x P1.0
		LP345-105	M105 x P1.0

StabEDGE[®] Technology | A/R Anti-Reflection Coated | $40/20$ 40/20 Scratch/Dig

Useful Range: 350-800nm | Cut-on Wavelength 50% T : 340nm | Tolerance: +/-10nm |
Peak Transmission: ≥98% | Surface Quality: 40/20

Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)	Wavelength (nm)	Transmission (%)
1100	79.01	900	86.93	700	98.64	500	98.22	300	1.34
1090	79.31	890	87.60	690	98.88	490	98.20		
1080	79.53	880	88.43	680	99.40	480	98.59		
1070	79.82	870	88.58	670	99.24	470	98.79		
1060	80.11	860	88.92	660	99.37	460	99.02		
1050	80.22	850	89.93	650	99.40	450	98.71		
1040	80.59	840	90.19	640	99.46	440	99.03		
1030	80.92	830	90.87	630	99.19	430	98.93		
1020	81.25	820	91.85	620	99.03	420	98.23		
1010	81.62	810	92.35	610	98.84	410	96.99		
1000	81.82	800	92.57	600	98.67	400	95.21		
990	82.34	790	93.82	590	98.32	390	92.04		
980	82.76	780	94.51	580	98.32	380	87.26		
970	83.12	770	95.23	570	98.05	370	79.85		
960	83.47	760	95.49	560	97.96	360	69.41		
950	84.13	750	96.18	550	97.93	350	56.89		
940	84.59	740	96.97	540	97.83	340	43.14		
930	85.23	730	97.28	530	97.81	330	29.18		
920	85.63	720	97.72	520	97.99	320	17.51		
910	86.15	710	98.30	510	98.08	310	7.95		

25.4[™] C-Mount



Threads between lens and sensor

Part #: LP345-25.4

Slip Mount



- Designed for lenses without filter threads, varifocal and wide-angle lenses
- Includes locking set screws to secure adapter to lens

Create Part # -

Use "S" and add the outside diameter of lens in mm (ex: 43mm)

Example: LP345-S43

Unmounted



Create Part# -

CIRCLE: Use "D" and add diameter in mm (ex: 19mm).
Example: LP345-D19



RECTANGLE: Use "R" and add length in mm (ex: 30mm) x width in mm (ex: 15mm). *Example: LP345-R30x15*

SQUARE: Use "R" and add side measurement in mm (ex: 15mm). *Example: LP345-R15*