# Options
Brackets

For the Bar Lights
LDL2 series

For the Bar Lights
LDL2-33X8

For the Bar Lights
LDL2 series

For the Flat Lights
TH series

Light joint bracket

For the Bar Lights LDL2 series

The angle of illuminating can be adjusted as you desire when securing the Light Unit.

L-model bracket

Model name	Applicable Light Unit (Common for all colors)
BK-LDL2	For the LDL2 series

Four-way mounting brackets

Model name	Applicable Light Unit (Common for all colors)
BK-LDQ2-33X8	For LDL2-33X8

Model name	Applicable Light Unit (Common for all colors/Four-unit use)	Dimensions A	Dimensions B
BK-LDQ2-41X16	LDL2-41X16	108	60
BK-LDQ2-80X16	LDL2-80X16	148	100
BK-LDQ2-119X16	LDL2-119X16	186	138
BK-LDQ2-74X30	LDL2-74X30	150	100
BK-LDQ2-146X30	LDL2-146X30	222	172
BK-LDQ2-218X30	LDL2-218X30	294	244
BK-LDQ2-266X30	LDL2-266X30	342	292

● Dimensions (mm)

BK-LDL2

5 10
2xØ3.5 (holes)
6
Ø3.2
20
28
R9
90°
10
32
(Two brackets are included.)

BK-LDQ2-33X8

86
86
21
36
36

BK-LDQ2

A
36.5
90°
A
B
B
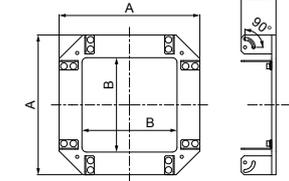
For the Flat Lights TH series

This is a dedicated bracket for securing the TH Series Light Units. You can secure TH Series Light Units at four points.

Model name	Applicable Light Unit (Common for all colors)
BK-TH-LE12	For the TH series

● Dimensions (mm)

BK-TH-LE12

5
Ø3.5(Hole)
12
7.5
12
7.5
Ø3.5(Hole)
5

(Four brackets are included.)

Light joint brackets

You can combine Dome and Ring Lights. Imaging can be performed by lighting switching or simultaneous lighting.

Model name	Applicable Light Unit 1 (Common for all colors)	Applicable Light Unit 2 (Common for all colors)	A	B	C	Thickness
BK-75-JO	HPD2-75 series	Used for all HPR2-75 colors	84	91	35	
		Used for all LDR2-100-LA colors				
		Used for all LDR-96-LA1 colors				
BK-100-JO	HPD2-100 series	Used for all HPR2-100 colors	106	116	32	
		Used for all LDR2-132-LA colors				
		Used for all LDR-146-LA1 colors				4
BK-150-JO	HPD2-150 series	Used for all HPR2-150 colors	140	166	42	
		Used for all LDR2-170-LA colors				
		Used for all LDR-176-LA1 colors				
BK-200-JO	HPD2-200 series	Used for all HPR2-200 colors	170	216	52	
		Used for all LDR2-208-LA colors				
		Used for all LDR-206-LA1 colors				
BK-250-JO	HPD2-250 series	Used for all HPR2-250 colors	210	266	56	

● Dimensions (mm)

BK-75-JO
BK-100-JO
BK-150-JO
BK-200-JO
BK-250-JO
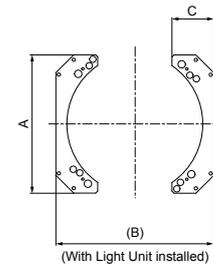
C
A
(B)
(With Light Unit installed)

Caution	Be sure to read the "Instruction Guide" included with the product before use and observe cautionary information.

Options
Brackets

Coaxial Light joint bracket
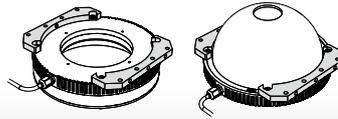
Expansion mounting bracket

→ Coaxial Light joint brackets

You can combine Dome and Coaxial Lights. Uniform illumination can be provided from all directions.
Irregular illuminating is eliminated.

Model name	Applicable Light Unit 1	Applicable Light Unit 2	Dimensions		
			A	B	C
BK-HPD2-75-LFV	HPD2-75 series	LFV3-35 series	95	66	33
BK-HPD2-100-LFV	HPD2-100 series	LFV3-50 series	113	84	45.5
BK-HPD2-150-LFV	HPD2-150 series		129.5	119	70.5
BK-HPD2-200-LFV	HPD2-200 series	LFV3-70 series	164	155	95.5
BK-HPD2-250-LFV	HPD2-250 series		200	190	116.5

● Dimensions (mm)

BK-HPD2-75-LFV
BK-HPD2-100-LFV
BK-HPD2-150-LFV
BK-HPD2-200-LFV
BK-HPD2-250-LFV
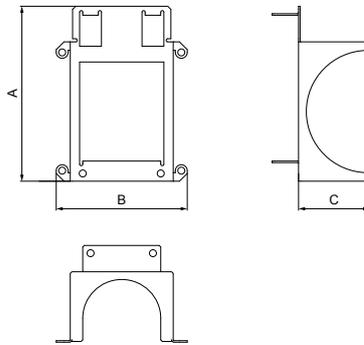
→ Expansion mounting brackets

These brackets are for expanding the mounting methods of Light Units. You can mount on horizontal as well as vertical surfaces.

Model name	Applicable Light Unit 1	Dimensions			
		A	B	C	D
BK-50-CI	HPR2-50 series	40	50	13	5
BK-75-CI	HPD2-75 series	70	91	22	
	HPR2-75 series				
BK-100-CI	HPD2-100 series	90	116	25	
	HPR2-100 series				
BK-150-CI	HPD2-150 series	122	166	33	6
	HPR2-150 series				
BK-200-CI	HPD2-200 series	160	216	40	
	HPR2-200 series				
BK-250-CI	HPD2-250 series	210	266	60	
	HPR2-250 series				

● Dimensions (mm)

BK-50-CI
BK-75-CI
BK-100-CI
BK-150-CI
BK-200-CI
BK-250-CI

(B)
(With Light Unit installed)
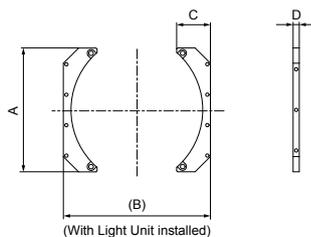
● Example of the expansion mounting bracket in use

Ring Light: Image of usage with the HPR2-200RD

● Example of the expansion mounting bracket in use

Dome Light: Image of usage with the HPD2-250SW

| Caution | Be sure to read the "Instruction Guide" included with the product before use and observe cautionary information. |