


## "B/E" Type with PVC Covered Monocoil Sheathing

**Temperature Rating:** -40° to 225°F  
**Fiber Size:** 0.002Ø ( 0.001Ø )  
**N.A.:** 0.55  
**Acceptance Cone:** 68°  
**Spectral Response:** 400nm to 2.0 microns  
**Proximal Tip:** See page 3 or 4 for specifications

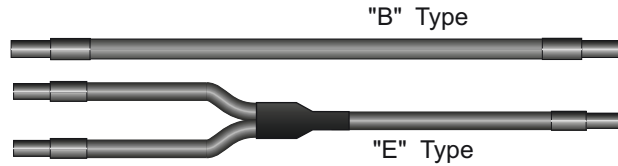

### SPECIFICATIONS

|  | SALES CODE | AØ     | DØ     | EØ     | OAL |
|--|------------|--------|--------|--------|-----|
|  | *MY2724    | 0.032" | 0.207" | 0.190" | 24" |
|  | _MY2736    |        |        |        | 36" |
|  | _MY2772    |        |        |        | 72" |
|  | _MY4124    | 0.041" | 0.207" | 0.190" | 24" |
|  | _MY4136    |        |        |        | 36" |
|  | _MY4172    |        |        |        | 72" |
|  | _MY6324    | 0.063" | 0.207" | 0.190" | 24" |
|  | _MY6336    |        |        |        | 36" |
|  | _MY6372    |        |        |        | 72" |
|  | _LS33224   | 0.094" | 0.250" | 0.190" | 24" |
|  | _LS33236   |        |        |        | 36" |
|  | _LS33272   |        |        |        | 72" |
|  |            |        |        |        | 24" |
|  |            |        |        |        | 36" |
|  |            |        |        |        | 72" |
|  | _LT624     | 0.063" | 0.250" | 0.230" | 24" |
|  | _LT636     |        |        |        | 36" |
|  | _LT672     |        |        |        | 72" |
|  | _LT824     | 0.125" | 0.250" | 0.230" | 24" |
|  | _LT836     |        |        |        | 36" |
|  | _LT872     |        |        |        | 72" |
|  | _LT524     | 0.156" | 0.312" | 0.268" | 24" |
|  | _LT536     |        |        |        | 36" |
|  | _LT572     |        |        |        | 72" |
|  | _L624T     | 0.063" | 0.250" | 0.230" | 24" |
|  | _L636T     |        |        |        | 36" |
|  | _L672T     |        |        |        | 72" |
|  | _L824T     | 0.125" | 0.250" | 0.230" | 24" |
|  | _L836T     |        |        |        | 36" |
|  | _L872T     |        |        |        | 72" |
|  | _L524T     | 0.156" | 0.312" | 0.268" | 24" |
|  | _L536T     |        |        |        | 36" |
|  | _L572T     |        |        |        | 72" |

\*NOTE: Add "B" for Thru-Beam (single leg), "E" for Reflective (dual leg)  
 \*\*Add "P" for heat shrink transition instead of metal