

# ML-M1616UR


## ML-M-UR series







Drawing No. A23072

レンズ形式	Lens Type	CCTV Lens	
フォーカス位置	Focus Position	Reference Magnification	M.O.D
光学倍率	Magnification	0.031	0.095
焦点距離 (mm)	Focal Length	16.16	16.16
Fno	Fno	1.60~16.00	
NA	Numerical Aperture	-	-
WD/OD (mm)	Working/Object Distance	500.0 / 507.0	150.0 / 157.0
O/I (mm)	Object to Image Distance	554.26	205.30
鏡筒長 (mm)	Mechanical Tube Length	35.50~37.00	
レンズバック (mm)	Lens Back	12.16	13.20
被写界深度 (mm)	DOF @PCoC $\phi$ 0.04mm	131.893	14.387
分解能 ( $\mu$ m)	Resolution @ $\lambda$ =550nm	-	-
前側/後側主点位置 (mm)	Front/Rear Principal Position	28.44 / -4.50	28.44 / -4.50
入射/出射瞳位置 (mm)	Entrance/Exit Pupil Position	18.85 / -28.07	18.85 / -28.07
入射/出射瞳径 (mm)	Entrance/Exit Pupil Diameter	10.18 / 25.02	10.18 / 25.02
画角 (deg.) H x V	Angle Of View	30.1 x 22.8	29.2 x 22.1
TVディストーション (%)	TV Distortion	-0.472	-0.674
周辺光量比 (%)	Relative Illumination	29.02	33.49
質量 (g)	Weight	131.1	
マウント	Mount	C mount	
イメージサークル径 (mm)	Image Circle	$\phi$ 11	
最大適合カメラ	Largest Compatible Camera	2/3 Inch	

### ML-M1616UR




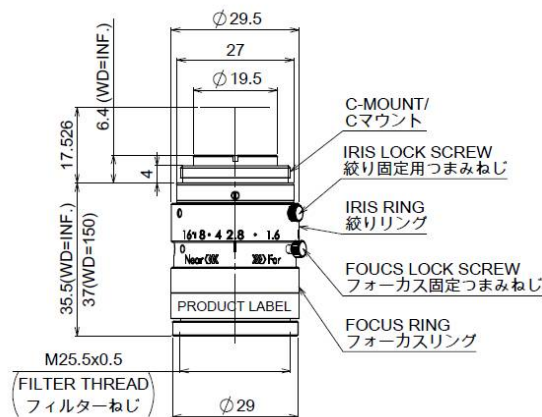


# WD=500.0mm Fno2.8

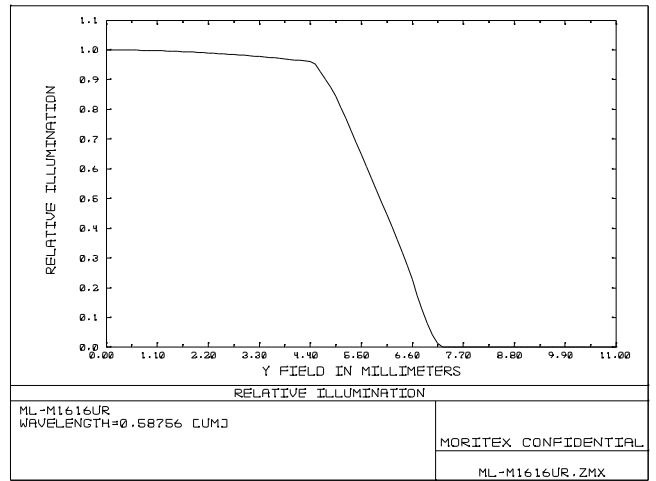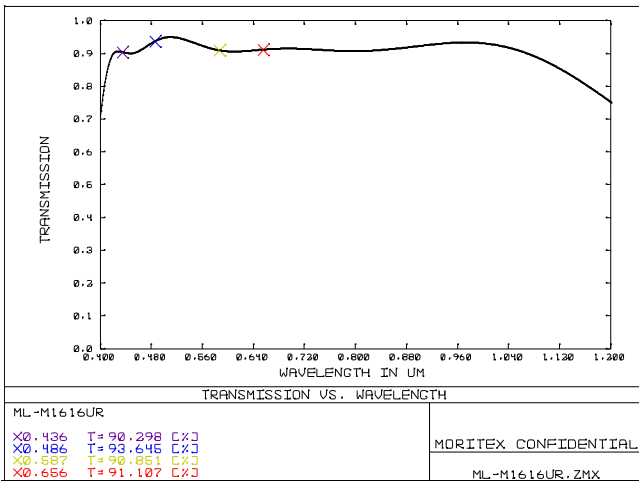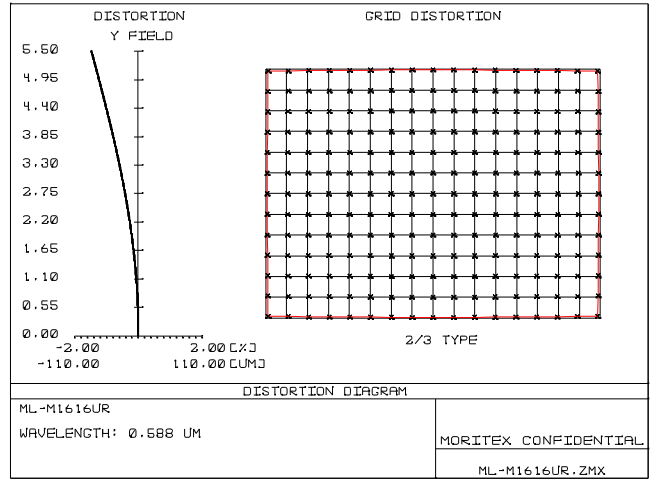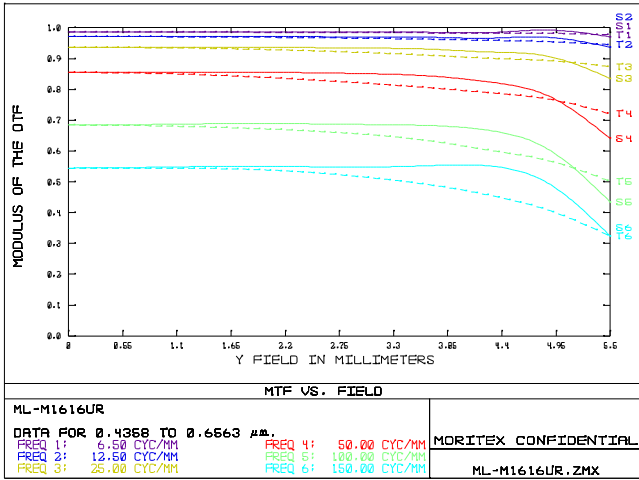

内容は、通知なしに随時変更されることがあります。  
 The content is subject to change at any time without notification.

# WD=300.0mm Fno2.8

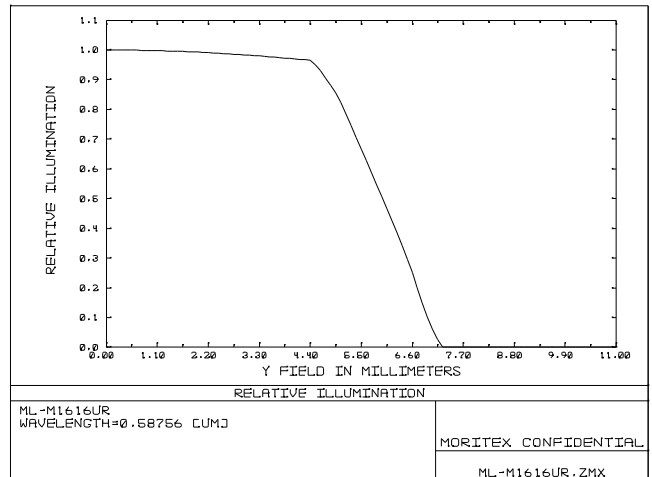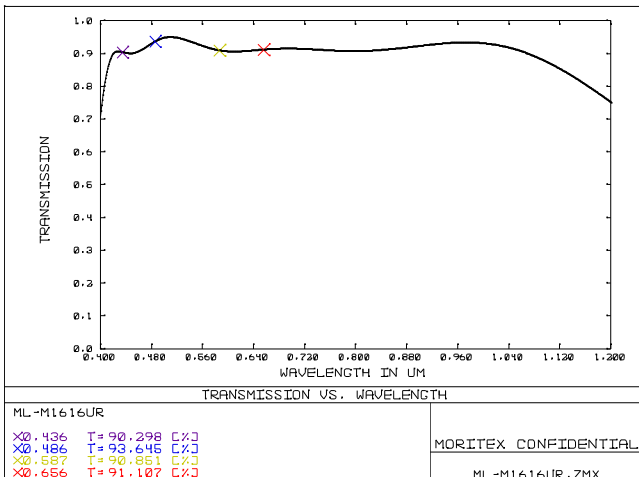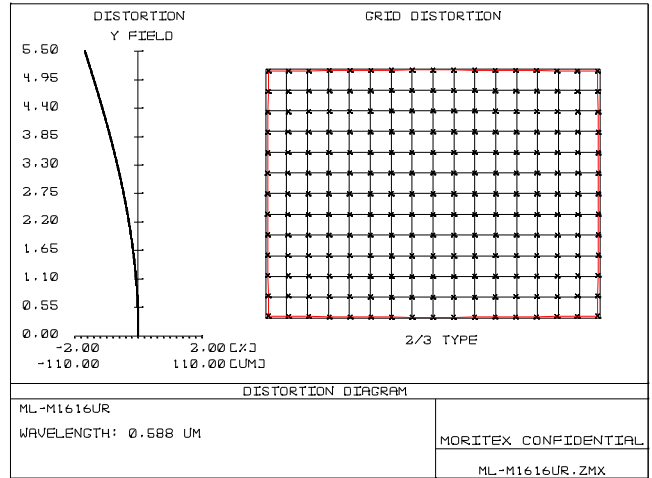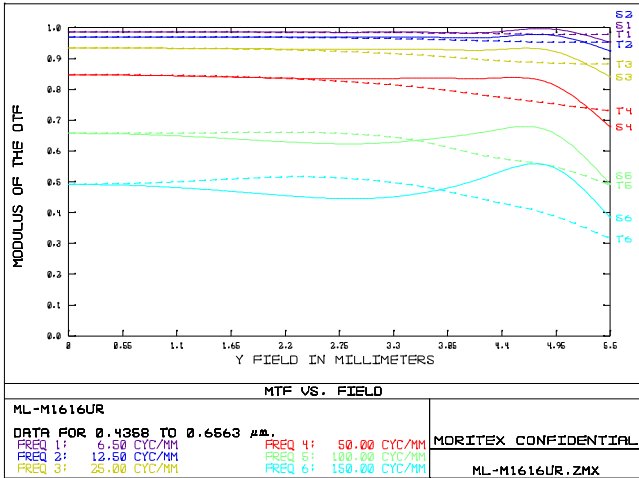

内容は、通知なしに随時変更されることがあります。  
 The content is subject to change at any time without notification.



Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01