

ML-M2516UR


ML-M-UR series







Drawing No. A23044

レンズ形式	Lens Type	CCTV Lens	
フォーカス位置	Focus Position	Reference Magnification	M.O.D
光学倍率	Magnification	0.049	0.152
焦点距離 (mm)	Focal Length	25.00	25.00
Fno	Fno	1.60~16.00	
NA	Numerical Aperture	-	-
WD/OD (mm)	Working/Object Distance	500.0 / 510.0	150.0 / 160.0
O/I (mm)	Object to Image Distance	553.34	205.92
鏡筒長 (mm)	Mechanical Tube Length	34.60~38.50	
レンズバック (mm)	Lens Back	13.75	16.33
被写界深度 (mm)	DOF @PCoC ϕ 0.04mm	54.223	5.835
分解能 (μ m)	Resolution @ λ =550nm	-	-
前側/後側主点位置 (mm)	Front/Rear Principal Position	29.42 / -12.46	29.42 / -12.46
入射/出射瞳位置 (mm)	Entrance/Exit Pupil Position	18.48 / -31.94	18.48 / -31.94
入射/出射瞳径 (mm)	Entrance/Exit Pupil Diameter	15.92 / 28.32	15.92 / 28.32
画角 (deg.) H x V	Angle Of View	19.4 x 14.6	18.4 x 13.5
TVディストーション (%)	TV Distortion	-0.041	-0.271
周辺光量比 (%)	Relative Illumination	47.08	51.08
質量 (g)	Weight	20.3	
マウント	Mount	C mount	
イメージサークル径 (mm)	Image Circle	ϕ 11	
最大適合カメラ	Largest Compatible Camera	2/3 Inch	

ML-M2516UR




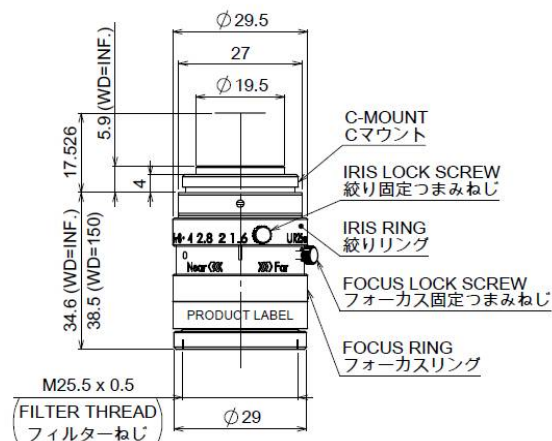


WD=500.0mm Fno2.8

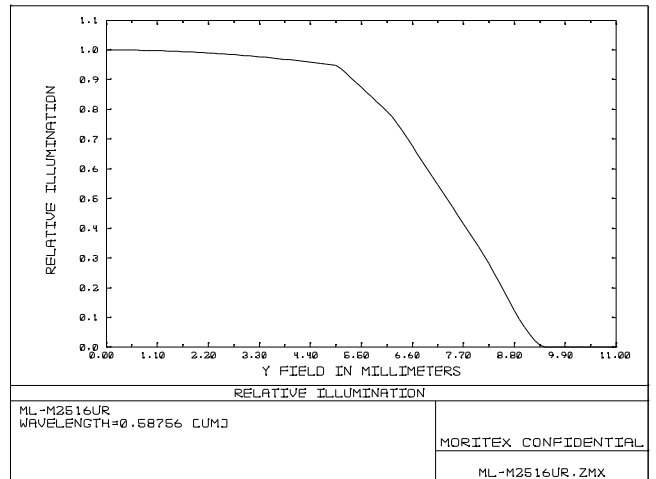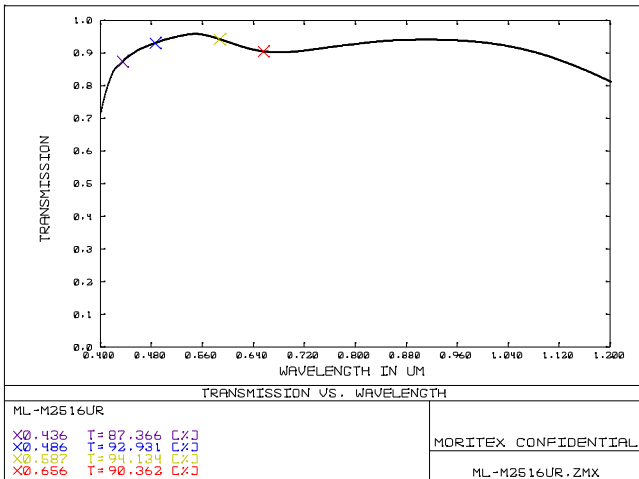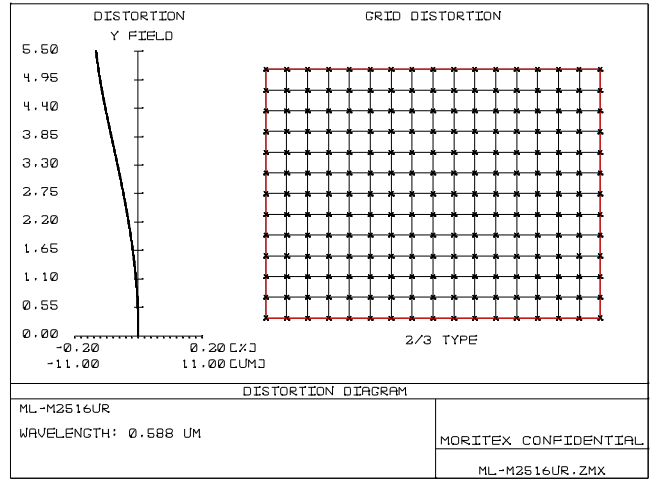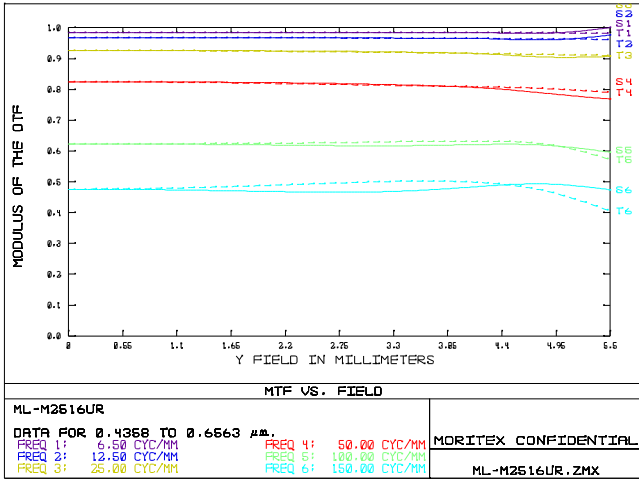

内容は、通知なしに随時変更されることがあります。
 The content is subject to change at any time without notification.

WD=300.0mm Fno2.8

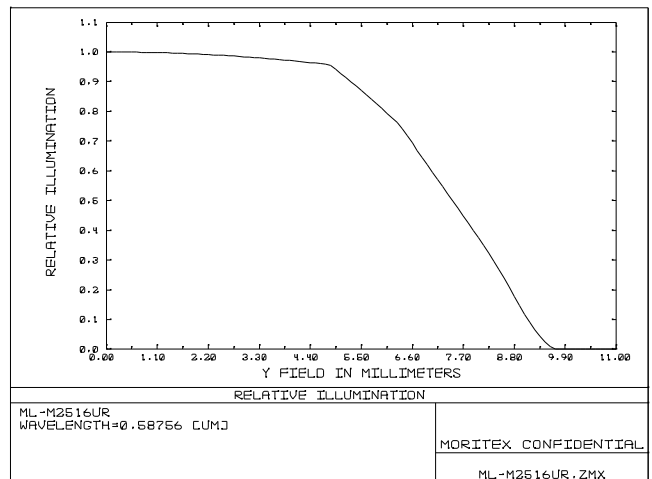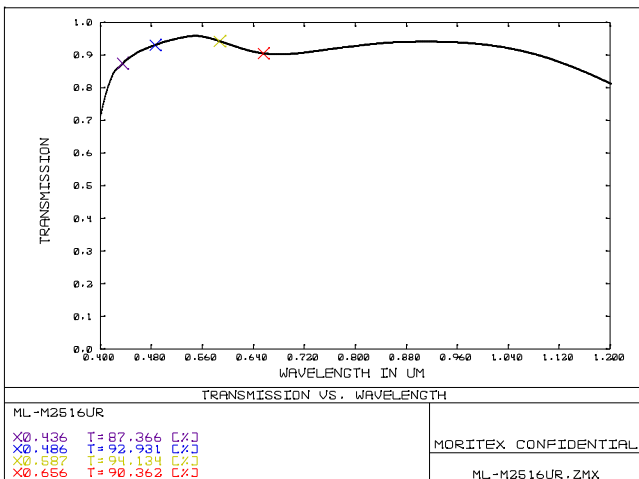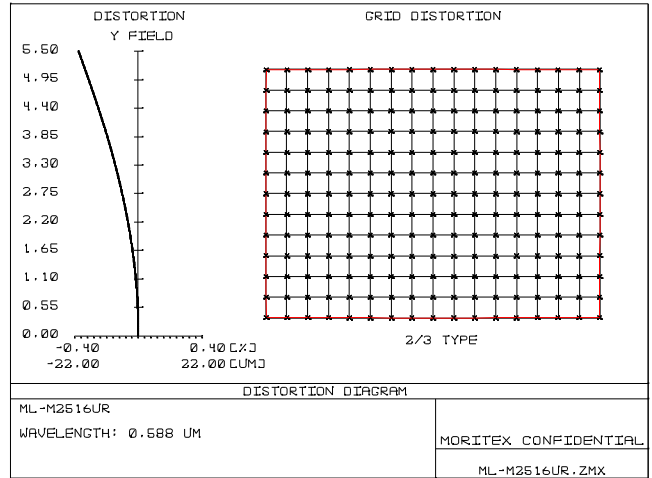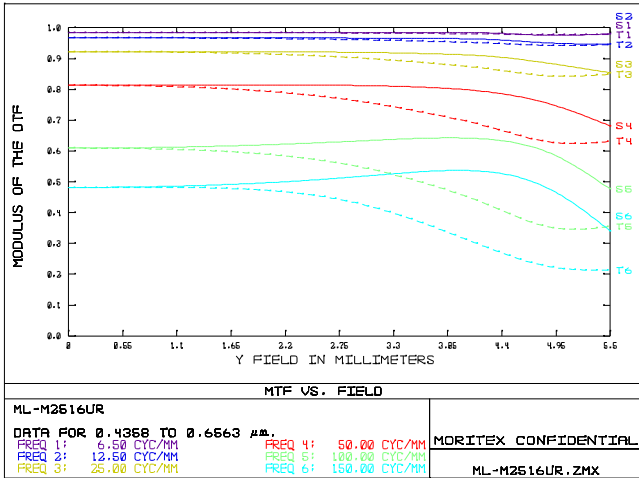

内容は、通知なしに随時変更されることがあります。
The content is subject to change at any time without notification.



Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands
Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl
Trade register No. 17150044, VAT No. NL8112.30.946.B01