





# BXY & EXY Series Light Guides

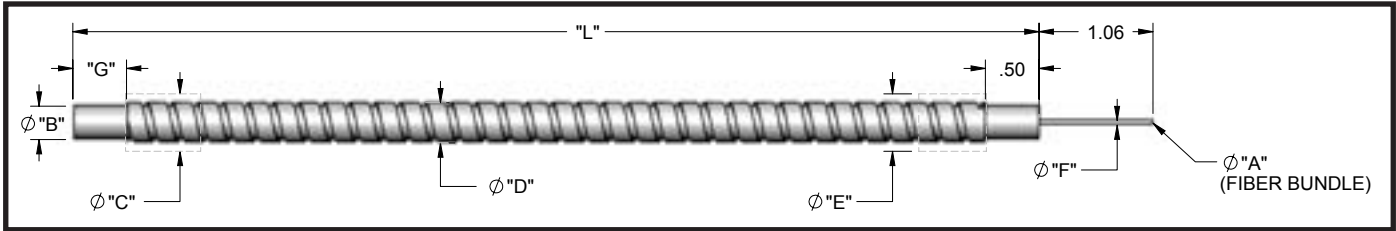


## BXY - Small Dia. Hypo-Tubing End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

| Model   | Part #       | A         | B         | C | D        | E | F         | G         | L               |
|---------|--------------|-----------|-----------|---|----------|---|-----------|-----------|-----------------|
| BXY2724 | SK83890024   | .032"     | .187"     | — | .205"    | — | .043"     | .50"      | 24" (609.6 mm)  |
| BXY2748 | SK83890048   | (.81 mm)  | (4.75 mm) | — | (5.2 mm) | — | (1.09 mm) | (12.7 mm) | 48" (1219.2 mm) |
| BXY4126 | 002114314026 | .041"     | .187"     | — | .205"    | — | .059"     | .50"      | 26" (660 mm)    |
| BXY4136 | 002114314036 | (1.04 mm) | (4.75 mm) | — | (5.2 mm) | — | (1.5 mm)  | (12.7 mm) | 36" (914.4 mm)  |
| BY6336  | 002114323036 | .063"     | .187"     | — | .205"    | — | .083"     | .50"      | 36" (914.4 mm)  |
| BY6372  | 002114323072 | (1.6 mm)  | (4.75 mm) | — | (5.2 mm) | — | (2.1 mm)  | (12.7 mm) | 72" (1828.8 mm) |

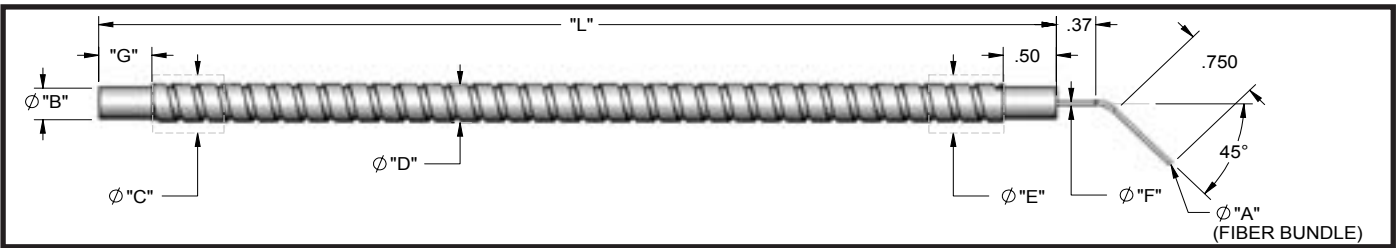


## BXMY - 45° Bend Hypo-Tubing End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

| Model    | Part #       | A         | B               | C | D        | E | F         | G         | L              |
|----------|--------------|-----------|-----------------|---|----------|---|-----------|-----------|----------------|
| BXMY2724 | 002114170024 | .032"     | .187" (4.75 mm) | — | .205"    | — | .043"     | .50"      | 24" (609.6 mm) |
| BXMY2736 | 002114170036 | (.81 mm)  |                 | — | (5.2 mm) | — | (1.09 mm) | (12.7 mm) | 36" (914.4 mm) |
| BMY4136  | 002114311036 | .041"     | .187" (4.75 mm) | — | .205"    | — | .059"     | .50"      | 36" (914.4 mm) |
|          |              | (1.04 mm) |                 | — | (5.2 mm) | — | (1.5 mm)  | (12.7 mm) |                |

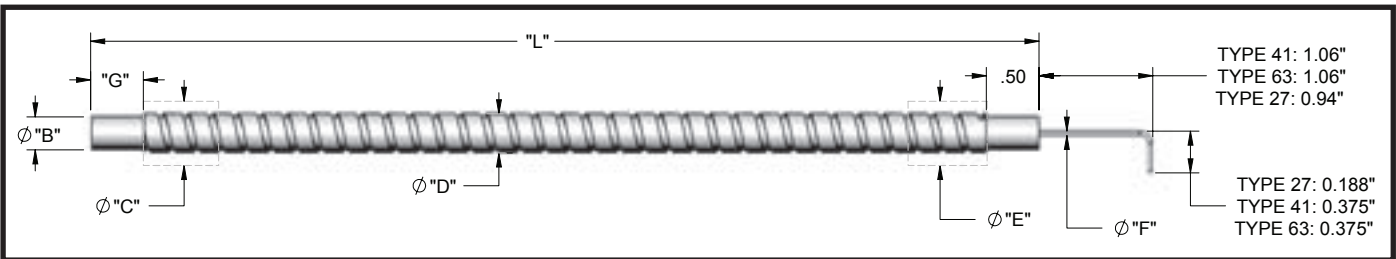


## BXLY - 90° Bend Hypo-Tubing End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F

| Model    | Part #       | A         | B               | C | D        | E | F         | G         | L               |
|----------|--------------|-----------|-----------------|---|----------|---|-----------|-----------|-----------------|
| BXLY2724 | SK99080024   | .032"     | .187" (4.75 mm) | — | .205"    | — | .043"     | .50"      | 24" (609.6 mm)  |
| BXLY2736 | SK99080036   | (.81 mm)  |                 | — | (5.2 mm) | — | (1.09 mm) | (12.7 mm) | 36" (914.4 mm)  |
| BXLY2748 | SK99080048   |           |                 | — |          | — |           |           | 48" (1219.2 mm) |
| BXLY2772 | SK99080072   |           |                 | — |          | — |           |           | 72" (1828.8 mm) |
| BXLY4136 | 002114312036 | .041"     | .187" (4.75 mm) | — | .205"    | — | .059"     | .50"      | 36" (914.4 mm)  |
| BXLY4172 | 002114312072 | (1.04 mm) |                 | — | (5.2 mm) | — | (1.5 mm)  | (12.7 mm) | 72" (1828.8 mm) |
| BXLY6336 | 002114322036 | .063"     | .187"           | — | .205"    | — | .083"     | .50"      | 36" (914.4 mm)  |
| BXLY6372 | 002114322072 | (1.6 mm)  | (4.75 mm)       | — | (5.2 mm) | — | (2.1 mm)  | (12.7 mm) | 72" (1828.8 mm) |

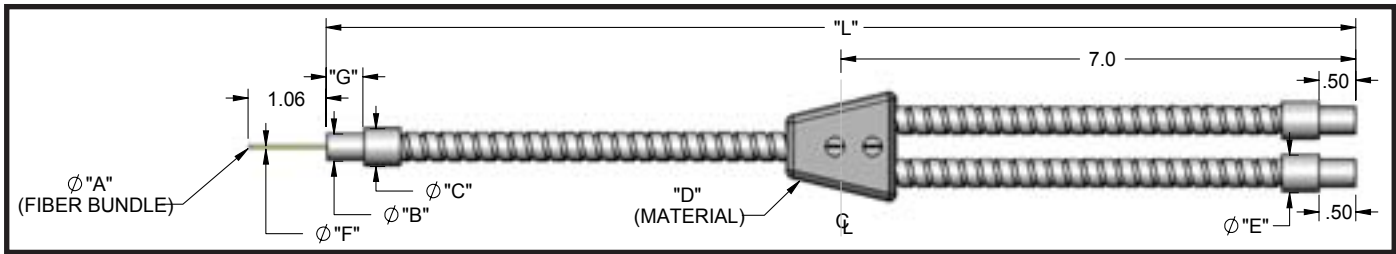

**EXY - Small Dia. Hypo-Tubing End Ferrule, Randomized, Stainless Steel Sheathing, Rated for -40°F to 500°F**

| Model   | Part #     | A                  | B                  | C | D                | E | F                 | G                 | L              |
|---------|------------|--------------------|--------------------|---|------------------|---|-------------------|-------------------|----------------|
| EXY4136 | SK76270036 | .041"<br>(1.04 mm) | .187"<br>(4.75 mm) | — | Metal Transition | — | .059"<br>(1.5 mm) | .50"<br>(12.7 mm) | 36" (914.4 mm) |

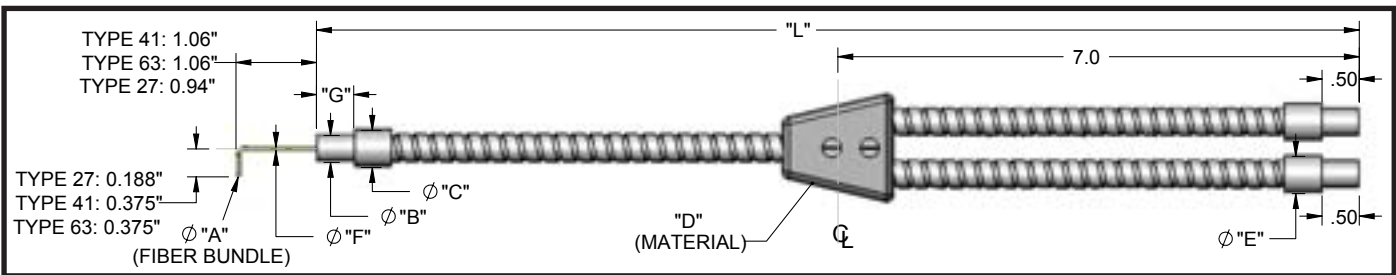

**EXLY - 90° Bend Hypo-Tubing End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 500°F**

| Model    | Part #       | A                 | B                  | C | D                | E | F                  | G                 | L               |
|----------|--------------|-------------------|--------------------|---|------------------|---|--------------------|-------------------|-----------------|
| EXLY2724 | SK68152724   | .032"<br>(.81 mm) | .187"<br>(4.75 mm) | — | Metal Transition | — | .043"<br>(1.09 mm) | .50"<br>(12.7 mm) | 24" (609.6 mm)  |
| EXLY2736 | SK68152736   | .032"<br>(.81 mm) | .187"<br>(4.75 mm) | — | Metal Transition | — | .043"<br>(1.09 mm) | .50"<br>(12.7 mm) | 36" (914.4 mm)  |
| EXLY6372 | 002124052072 | .063"<br>(1.6 mm) | .187"<br>(4.75 mm) | — | Metal Transition | — | .083"<br>(2.1 mm)  | .50"<br>(12.7 mm) | 72" (1828.8 mm) |

**Vision Light Tech B.V.**

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01