


"B/E" Type with PVC Covered Monocoil Sheathing

Temperature Rating: -40° to 225°F
Fiber Size: 0.002Ø (0.001Ø)
N.A.: 0.55
Acceptance Cone: 68°
Spectral Response: 400nm to 2.0 microns
Proximal Tip: See page 3 or 4 for specifications

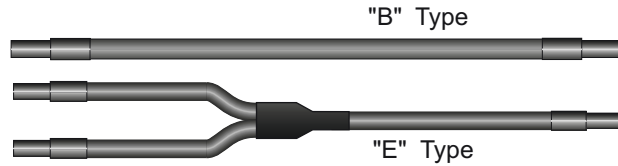

SPECIFICATIONS

	SALES CODE	AØ	DØ	EØ	OAL	
	*MY2724	0.032"	0.207"	0.190"	24"	
	_MY2736				36"	
	_MY2772				72"	
	_MY4124	0.041"	0.207"	0.190"	24"	
	_MY4136				36"	
	_MY4172				72"	
	_MY6324	0.063"	0.207"	0.190"	24"	
	_MY6336				36"	
	_MY6372				72"	
		_LS33224	0.094"	0.250"	0.190"	24"
		_LS33236				36"
		_LS33272				72"
					24"	
					36"	
					72"	
	_LT624	0.063"	0.250"	0.230"	24"	
	_LT636				36"	
	_LT672				72"	
	_LT824	0.125"	0.250"	0.230"	24"	
	_LT836				36"	
	_LT872				72"	
	_LT524	0.156"	0.312"	0.268"	24"	
	_LT536				36"	
	_LT572				72"	
		_L624T	0.063"	0.250"	0.230"	24"
		_L636T				36"
		_L672T				72"
_L824T		0.125"	0.250"	0.230"	24"	
_L836T					36"	
_L872T					72"	
_L524T		0.156"	0.312"	0.268"	24"	
_L536T					36"	
_L572T					72"	

*NOTE: Add "B" for Thru-Beam (single leg), "E" for Reflective (dual leg)
 **Add "P" for heat shrink transition instead of metal