



Model MI-150, MI-152, MI-157 150 Watt Illuminators



Standard Features:

- Low Noise, Low Vibration
- Easy Access Lamp Change
- Stackable Housing
- Solid State Intensity Control (10-100%)
- 3-Year Warranty
- UL/C-UL, CE

Accessories & Options:

- IR Filter and Holder
- Manually Adjustable Iris (see MI-157)
- Remote On/Off Switch
- Remote Variable Intensity





Technical Information

| Model: | MI-150 | MI-152 | MI-157 |
|------------------------------|--|--------------|--------------------------------|
| P/N: | 660000391010 | 660000461011 | 660001224010 |
| Input: | 115 V AC (230 V AC optional) | | |
| Lamp: | 150 Watt, 21 V, EKE qtz halogen | | EKE-X |
| Lamp Output: | 1750 Lumens at fiber optic insertion plane | | |
| Color Temp.: | 3250° Kelvin at max. intensity | | |
| Lamp Life: | 200 hrs. | | 1000 hrs. |
| Fiber Optic Interface: | 15mm | 25mm | 25mm w/ Manually Adjusted Iris |
| Intensity Control: | Solid state 10-100% | | |
| Noise Level: | <25 dB | | |
| 115 V Safety Certifications: | UL, C-UL | | |
| 230 V Safety Certifications: | UL, CE, C-UL | | |
| Dimensions: | 8.8" x 8.3" x 5"; 9 lbs | | |

Options

| | MI-150F | MI-152F | MI-157F |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| 115v w/ IR filter & holder: | 660000391011 | 660000465011 | 660001224011 |
| 230v input: | MI-1501 660000392020 | MI-1521 660000462011 | MI-1572 660001224020 |
| 230v w/ IR filter & holder: | MI-1501F 660000392021 | MI-1521F 660000467011 | MI-1572F 660001224021 |

MI150 Dimensions:

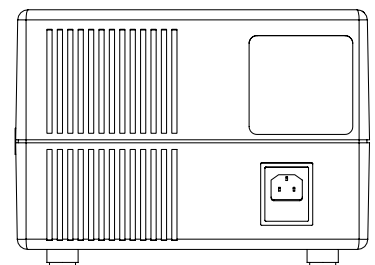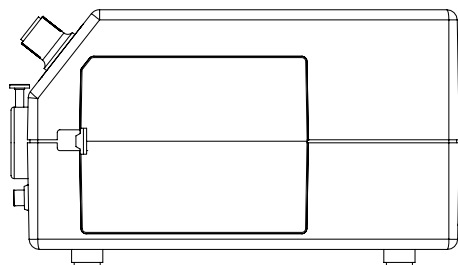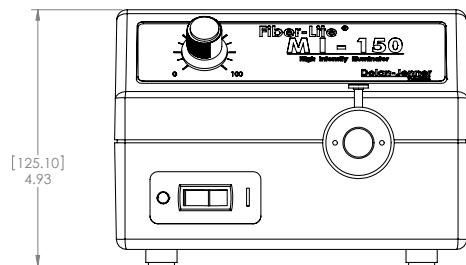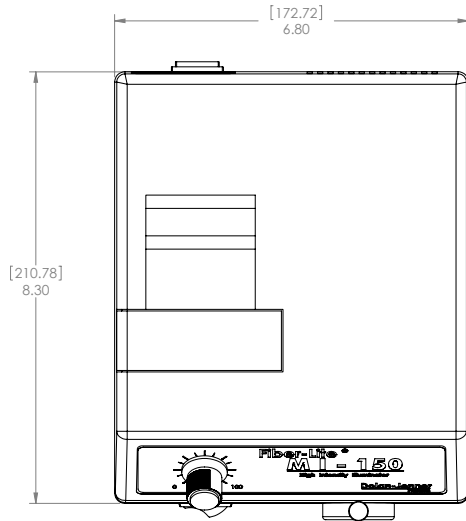

[mm]
in

Dolan-Jenner

industries

Dolan-Jenner Industries
159 Swanson Rd.
Dorchester, MA 01910 USA

Phone: 800.833.4237
Fax: 978.264.0292
Email: support@dolan-jenner.com

Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01